

FIG. 1



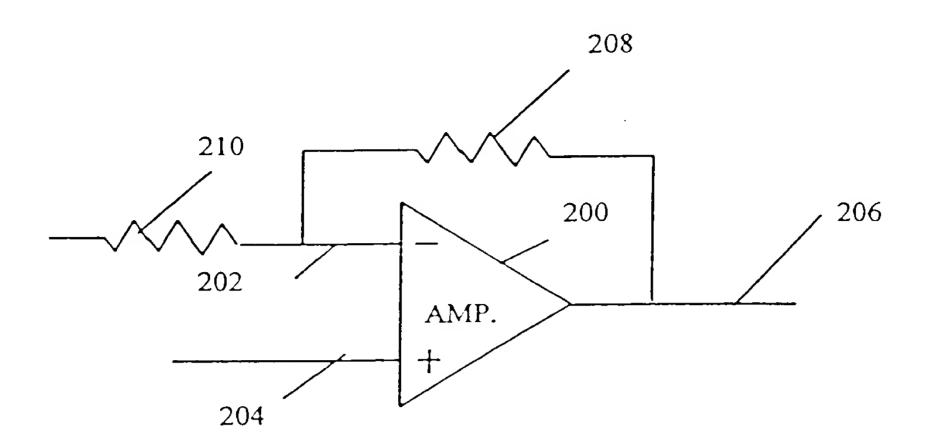



FIG. 2

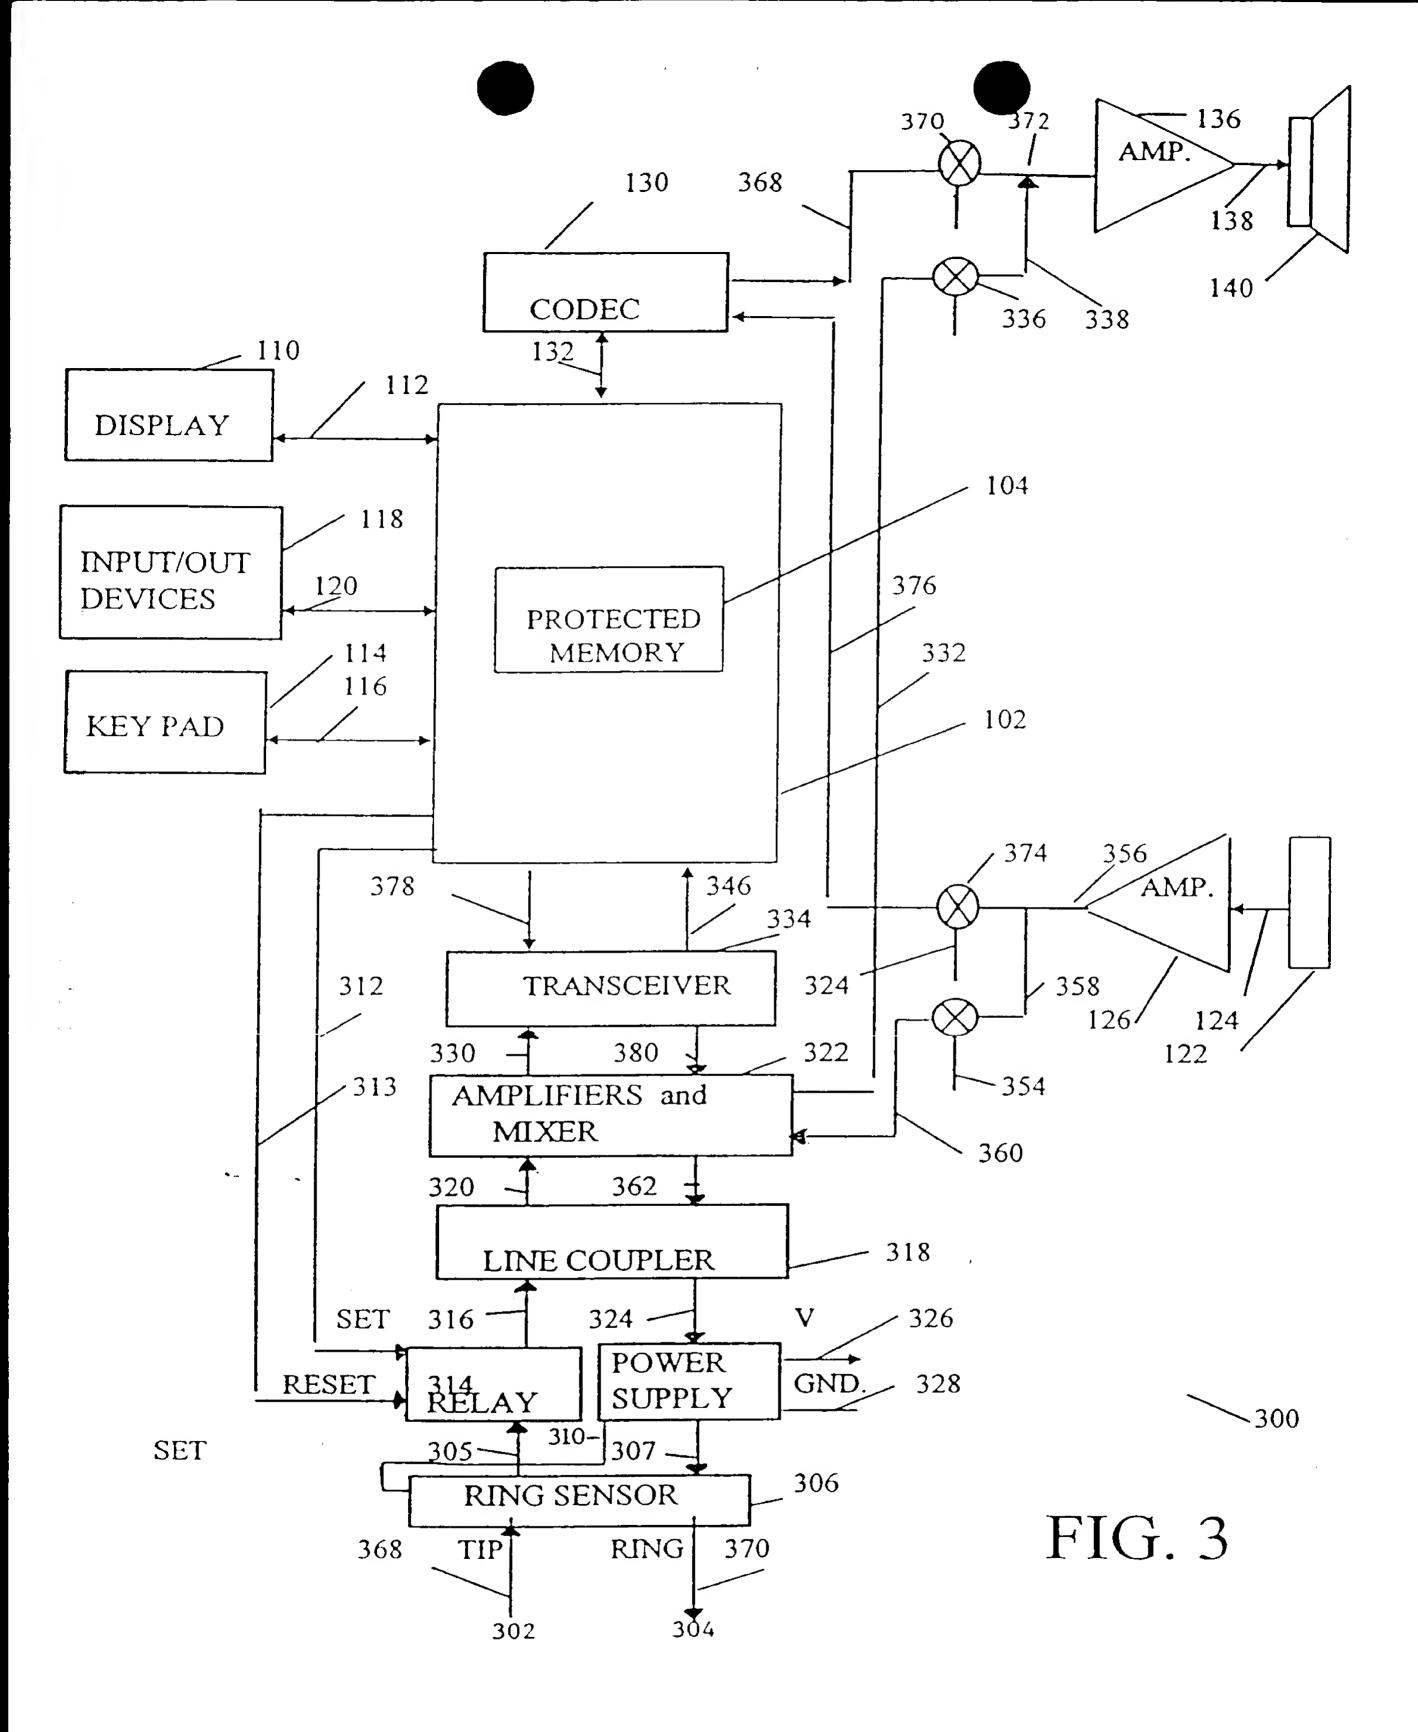

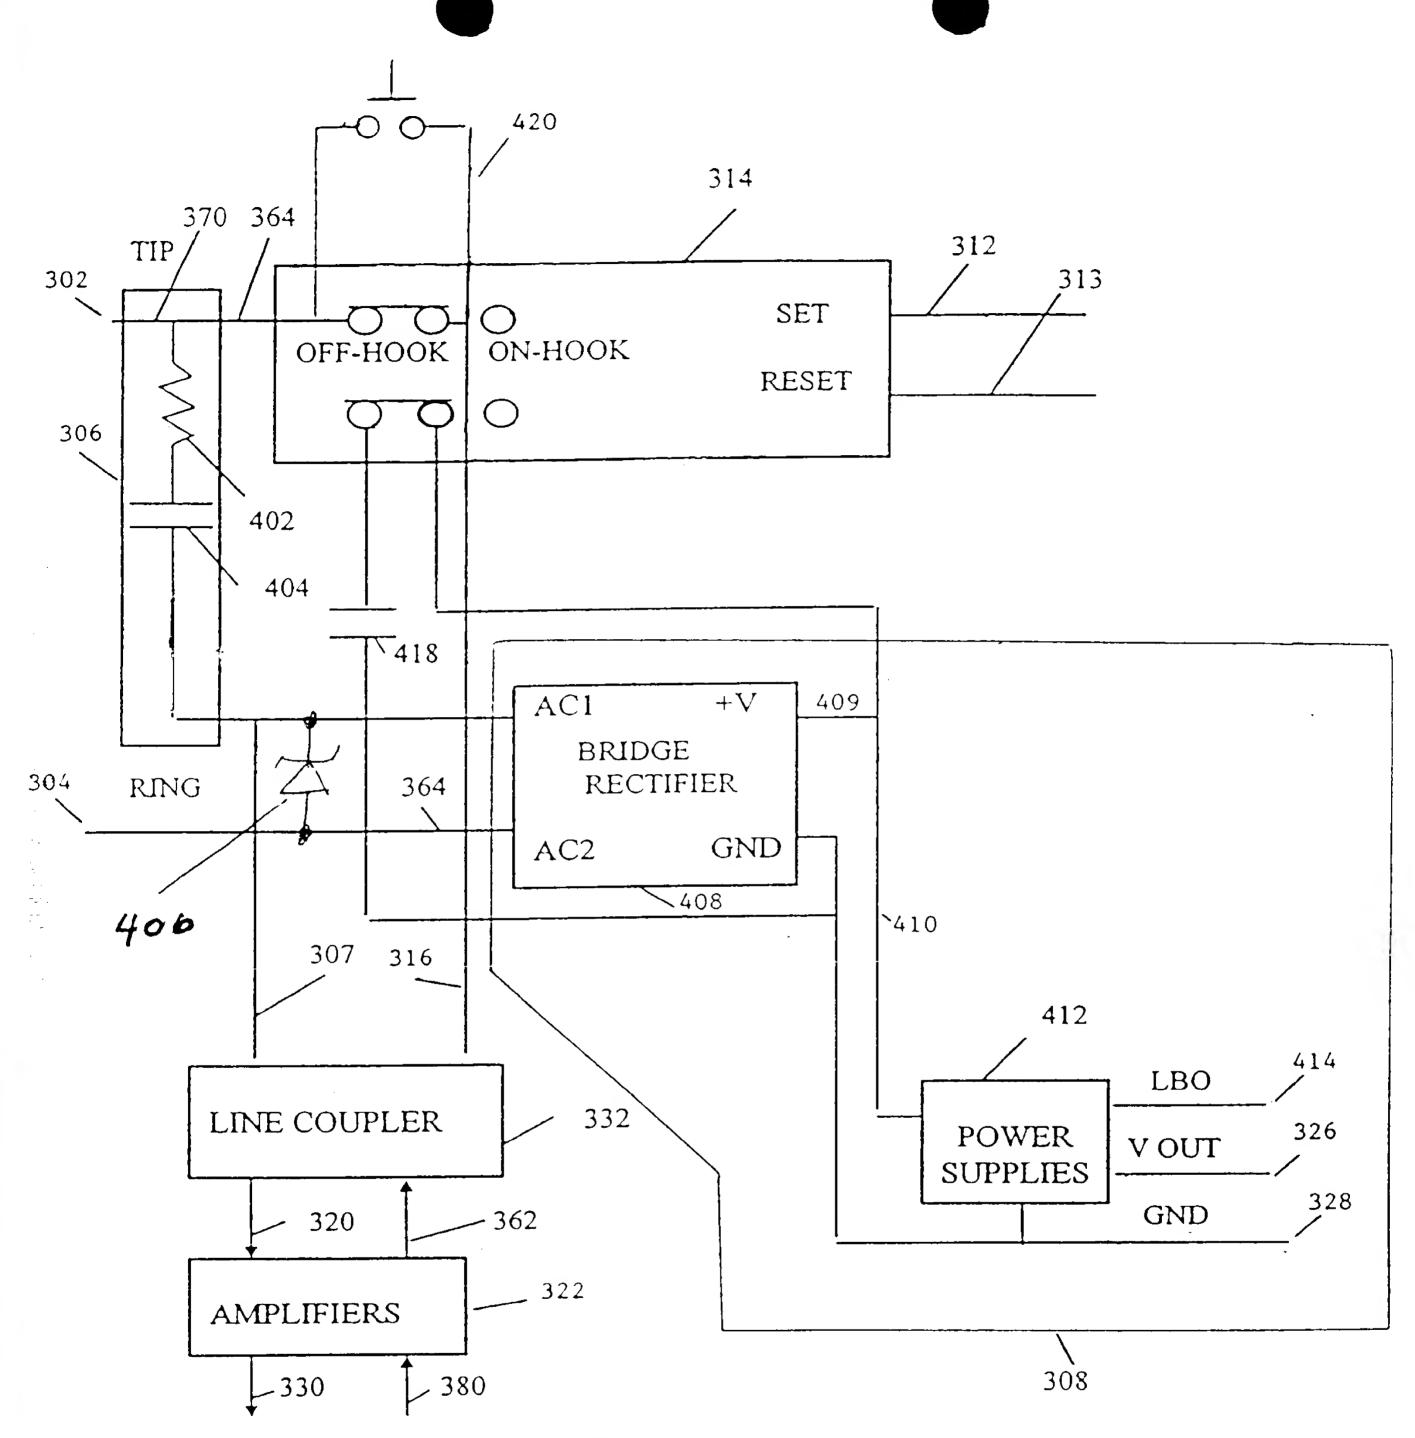

TO TRANSCEIVER and AUDIO AMPS.

FIG. 4

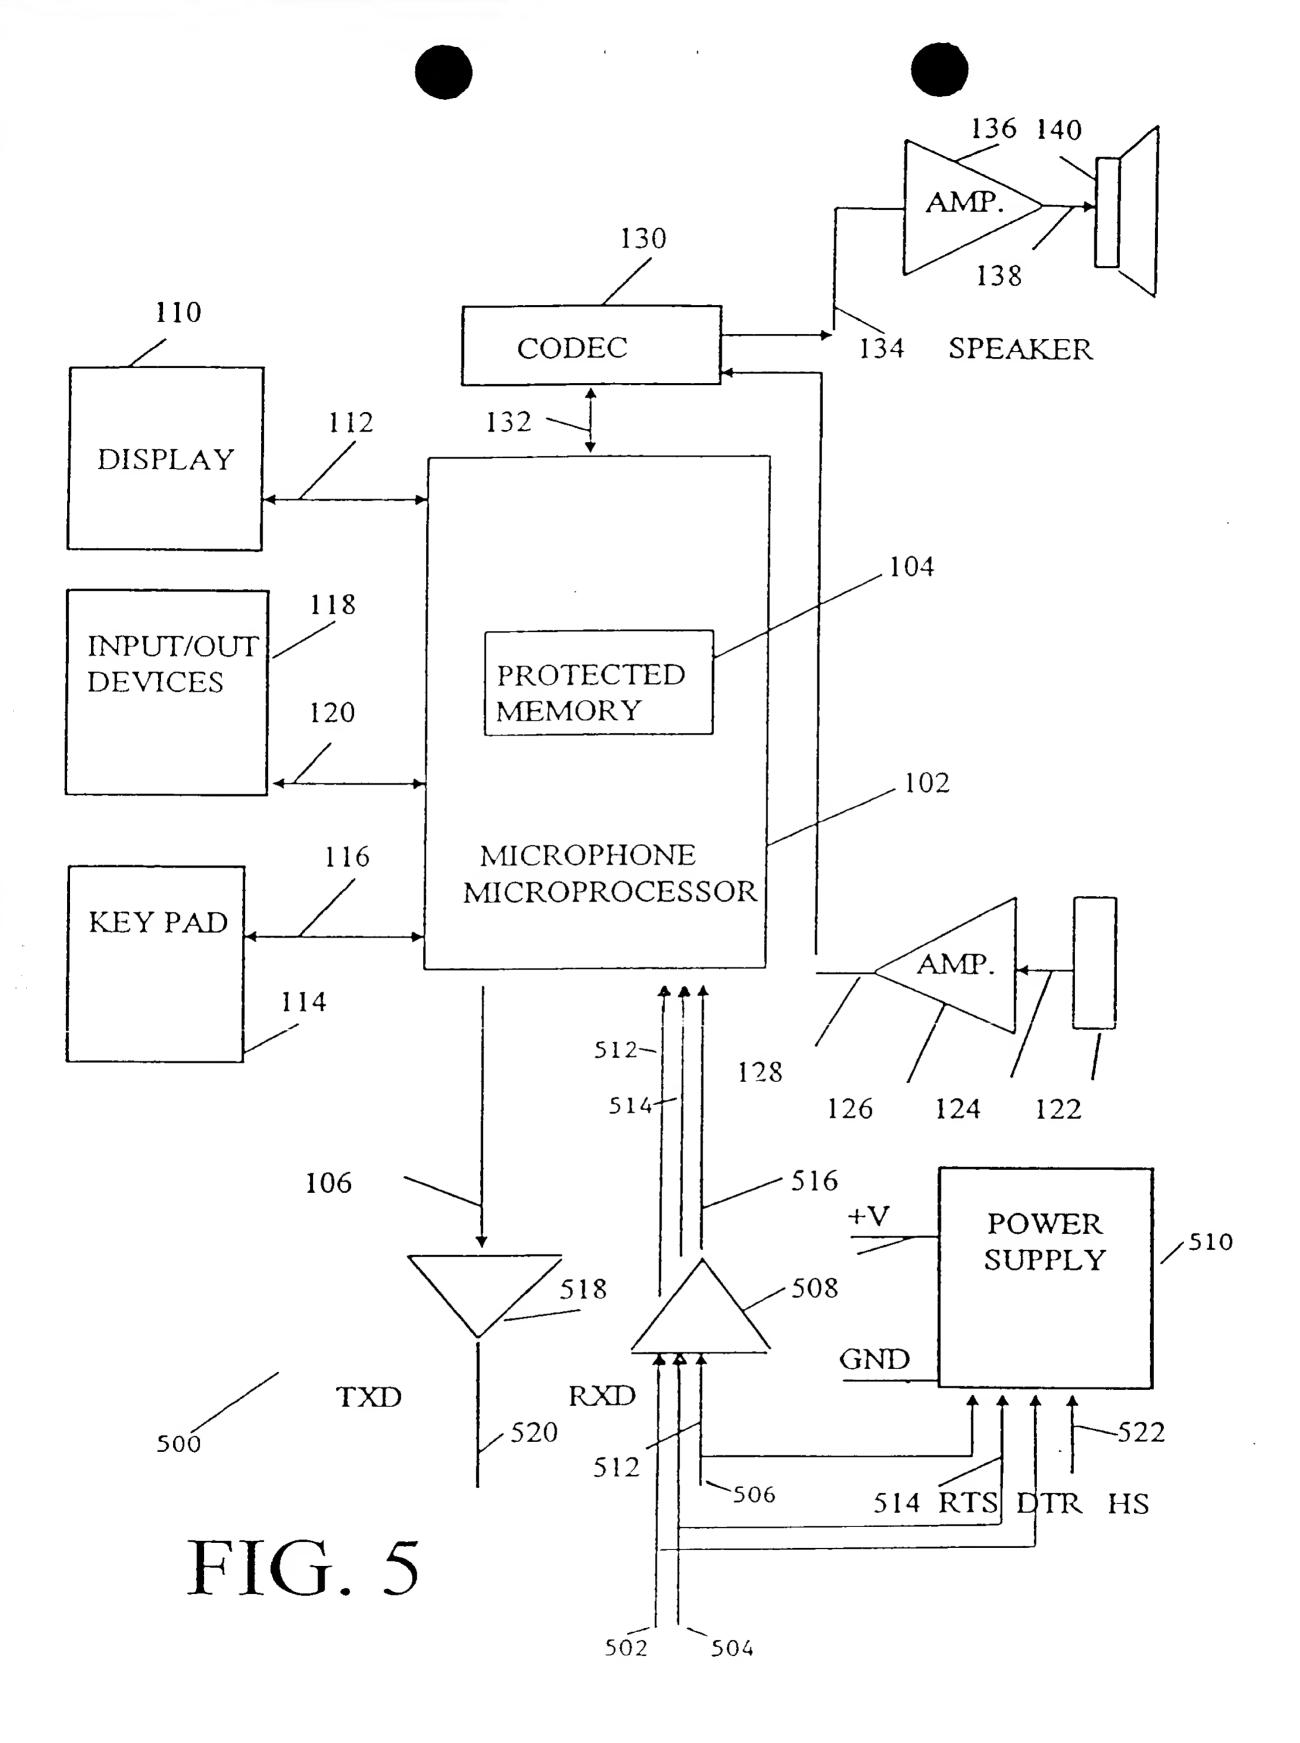

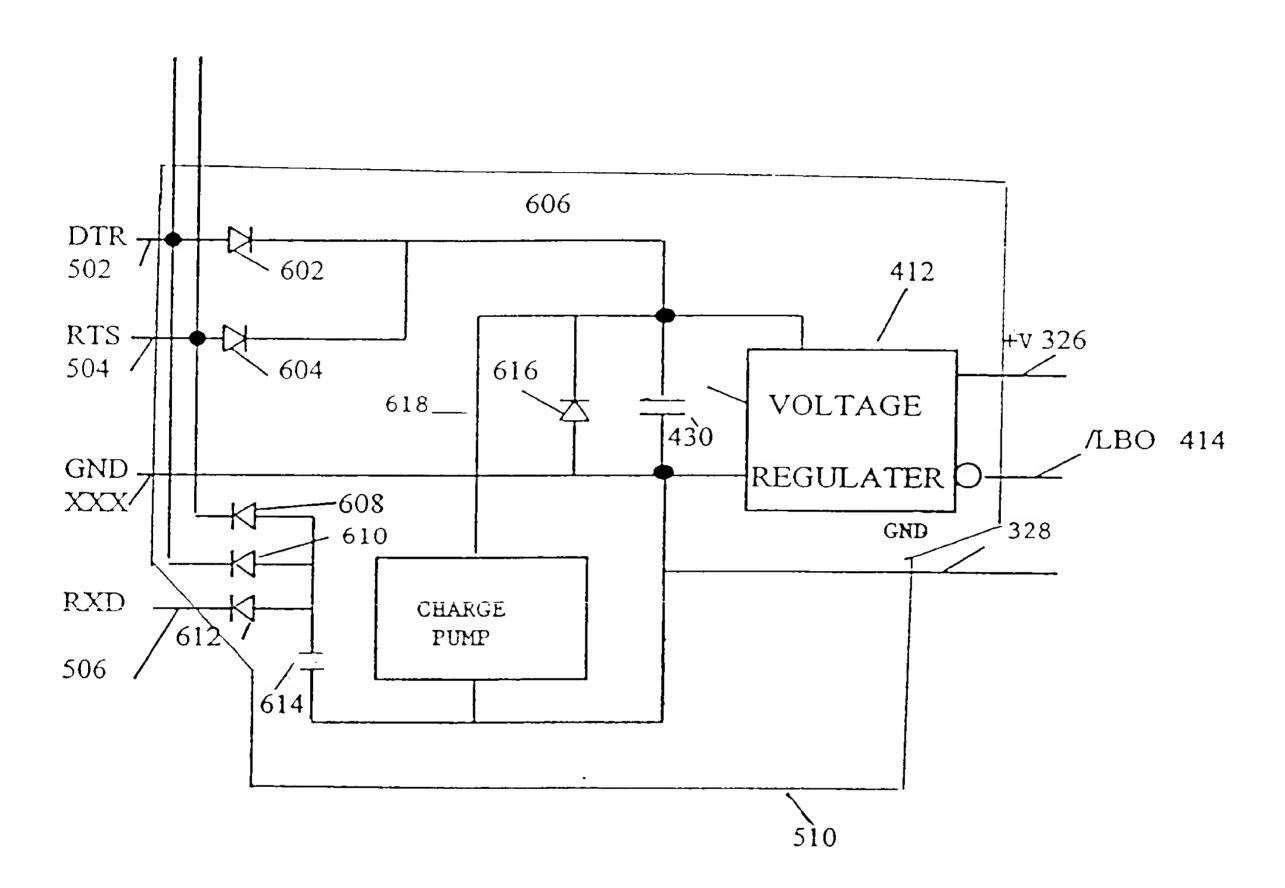
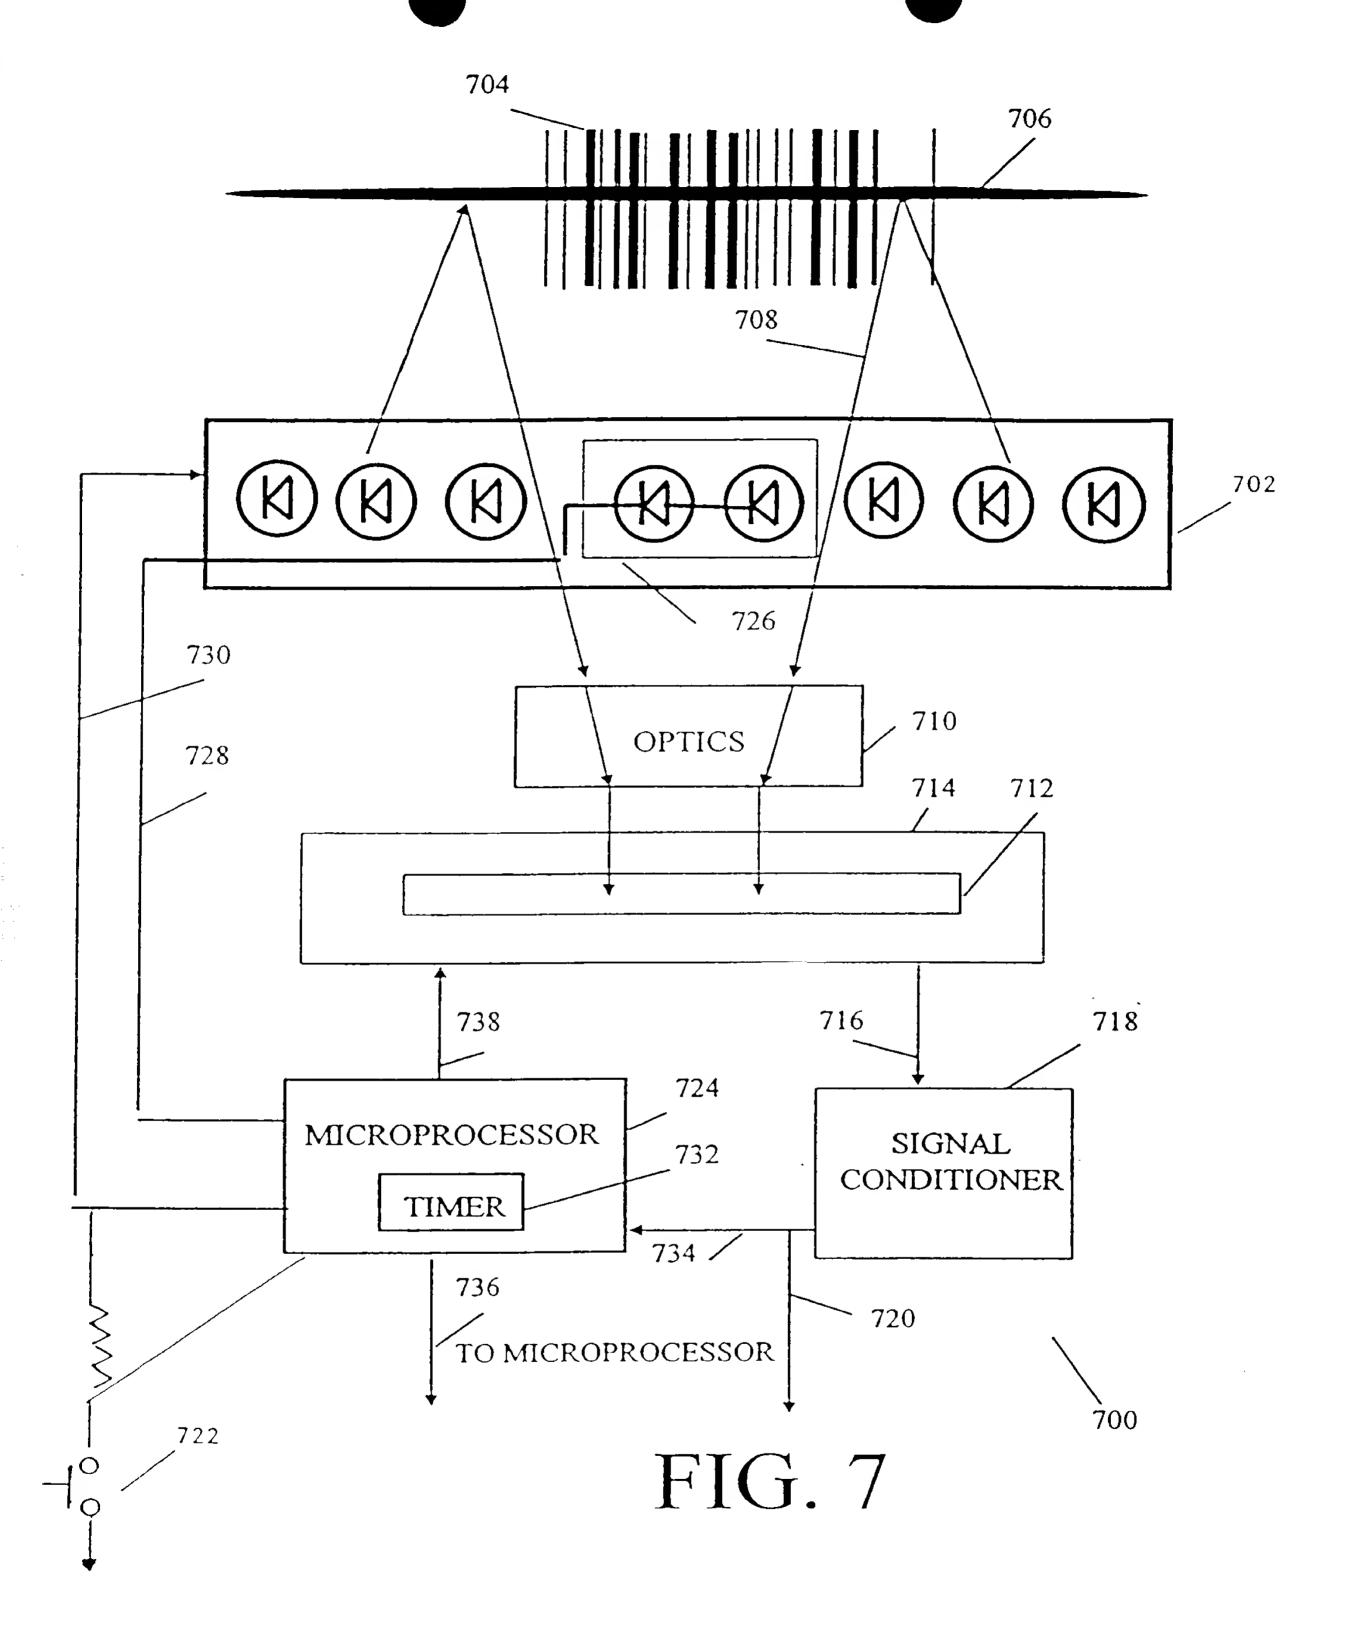


FIG. 6



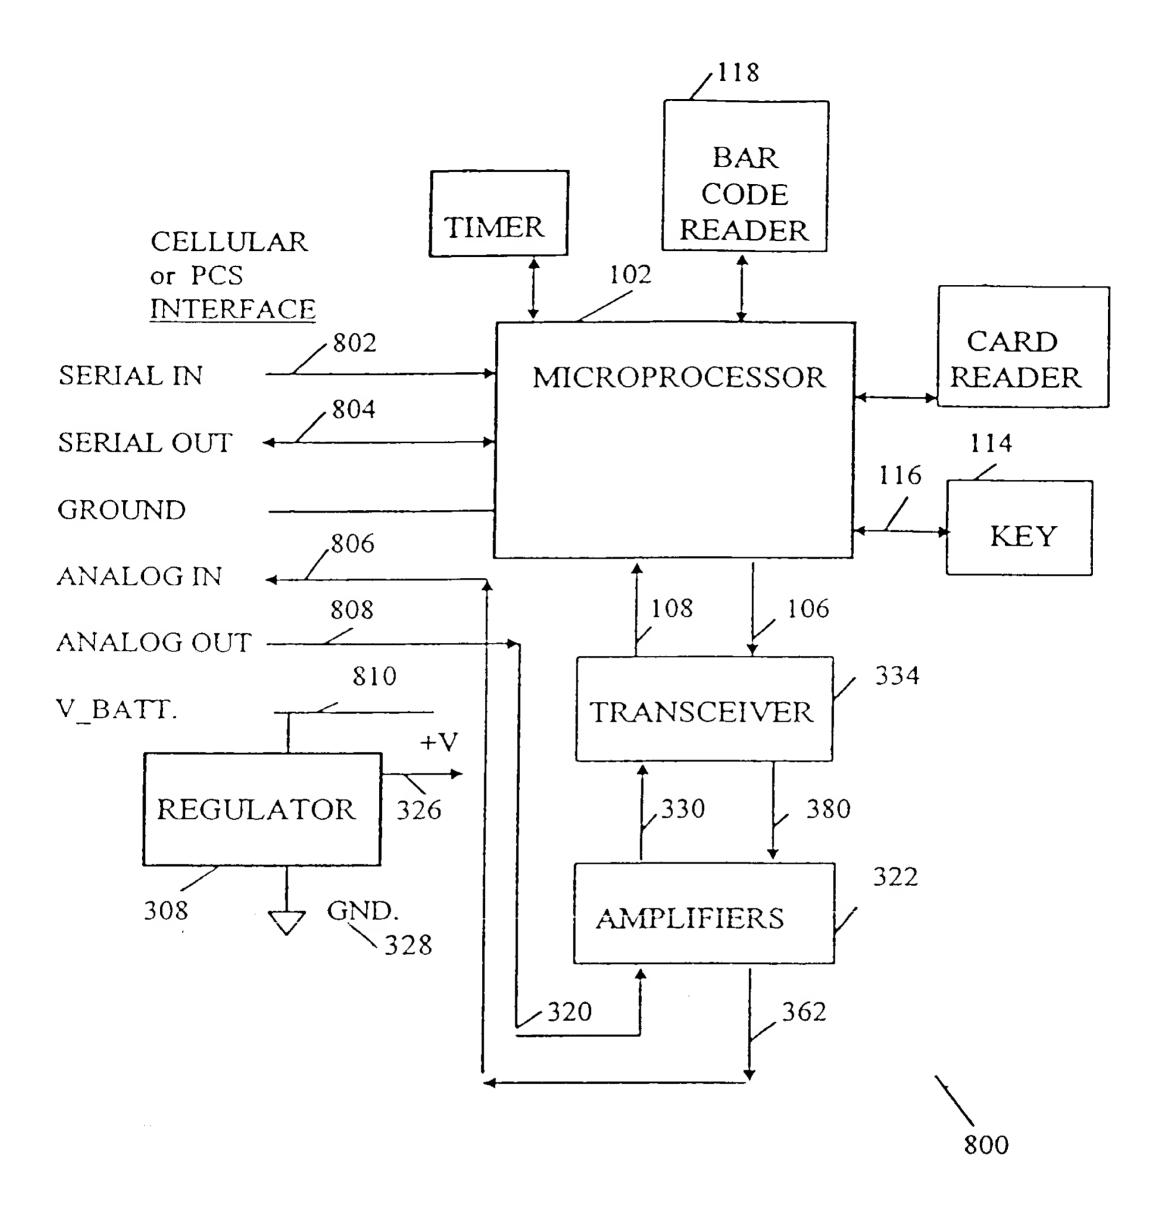
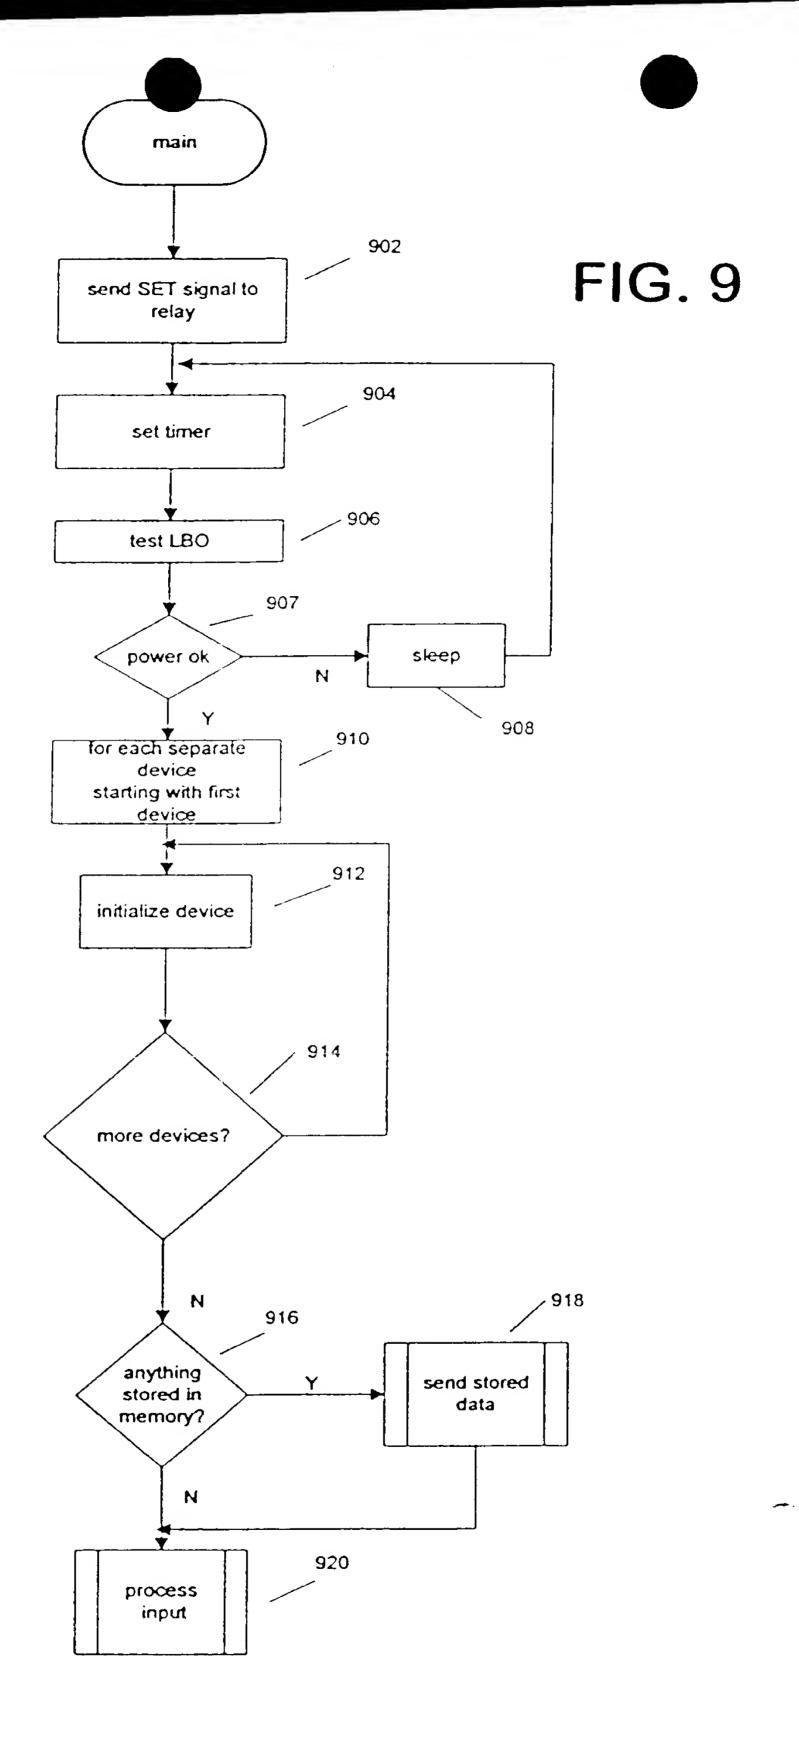
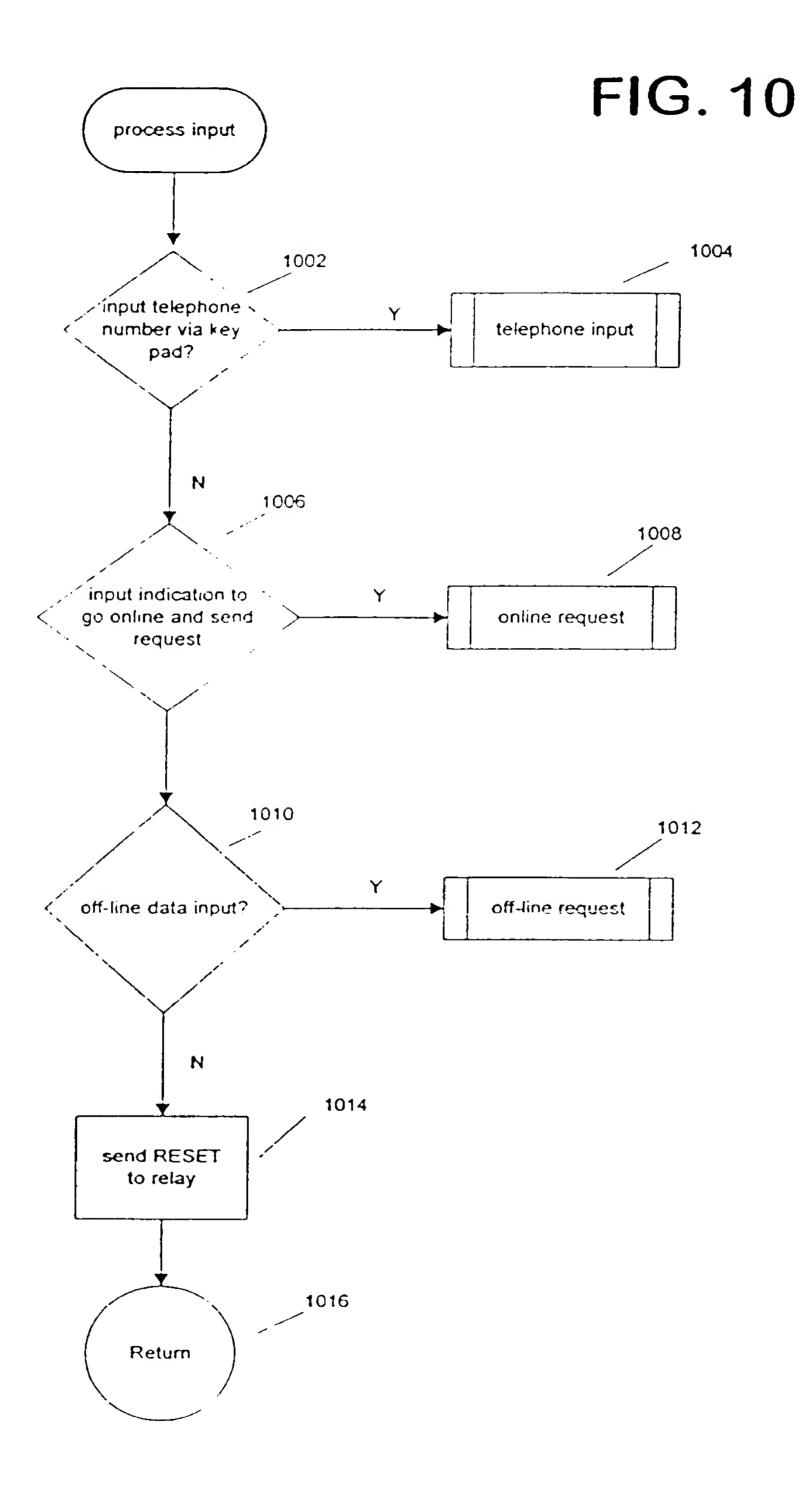


FIG.8






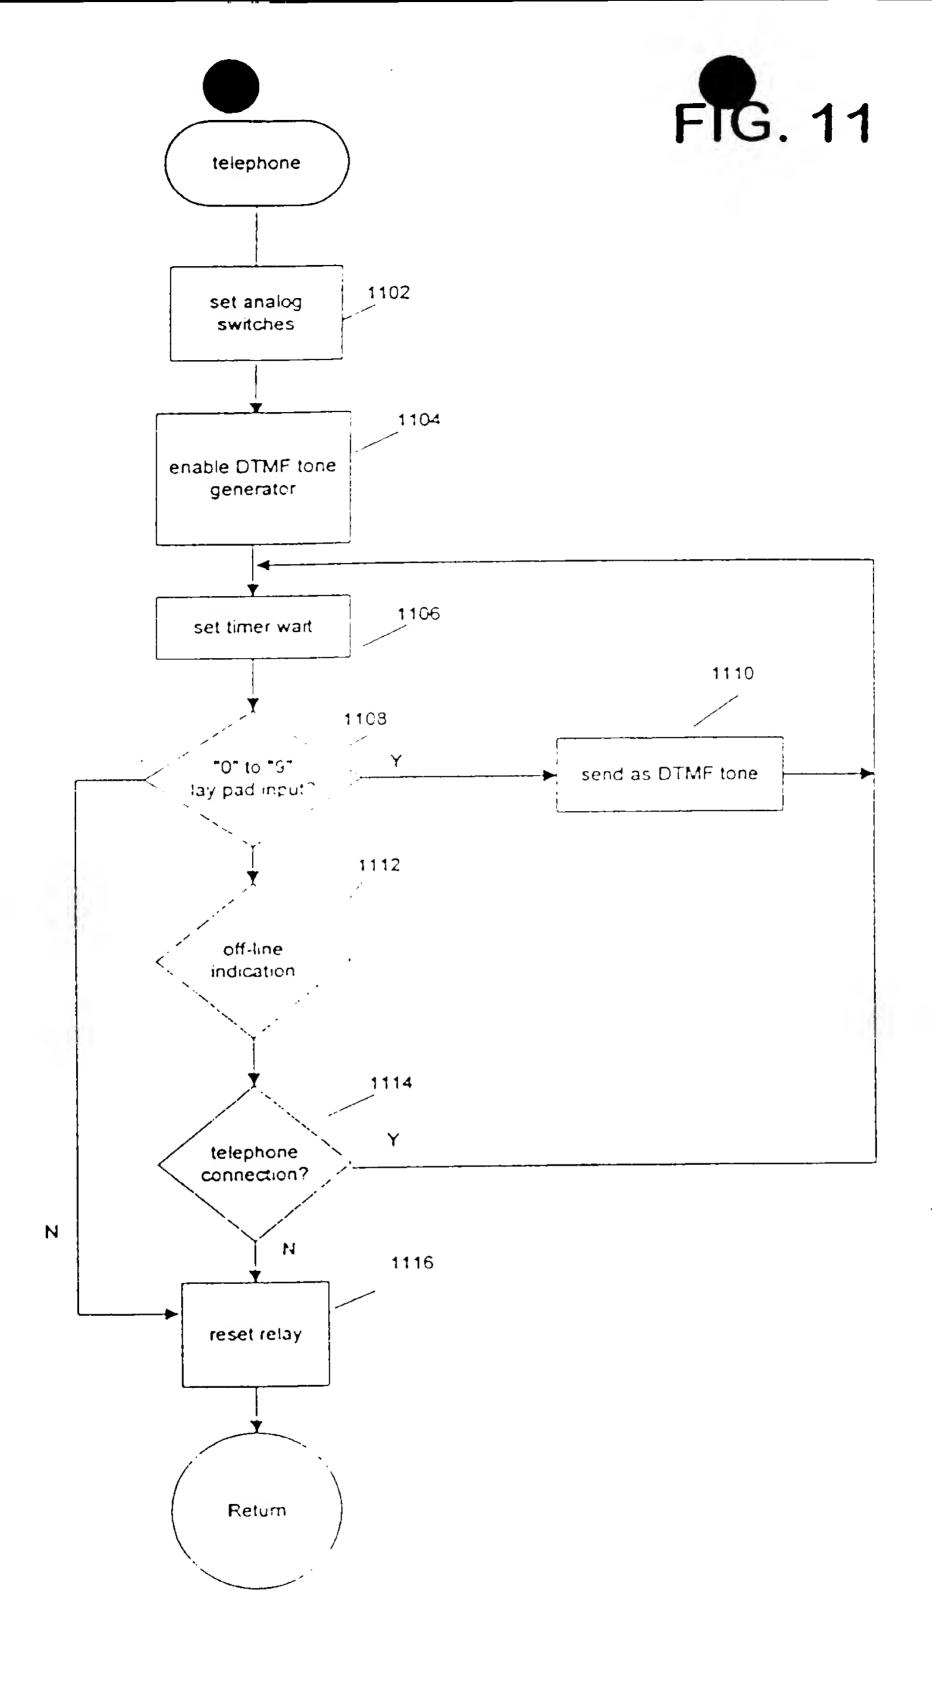


FIG. 12

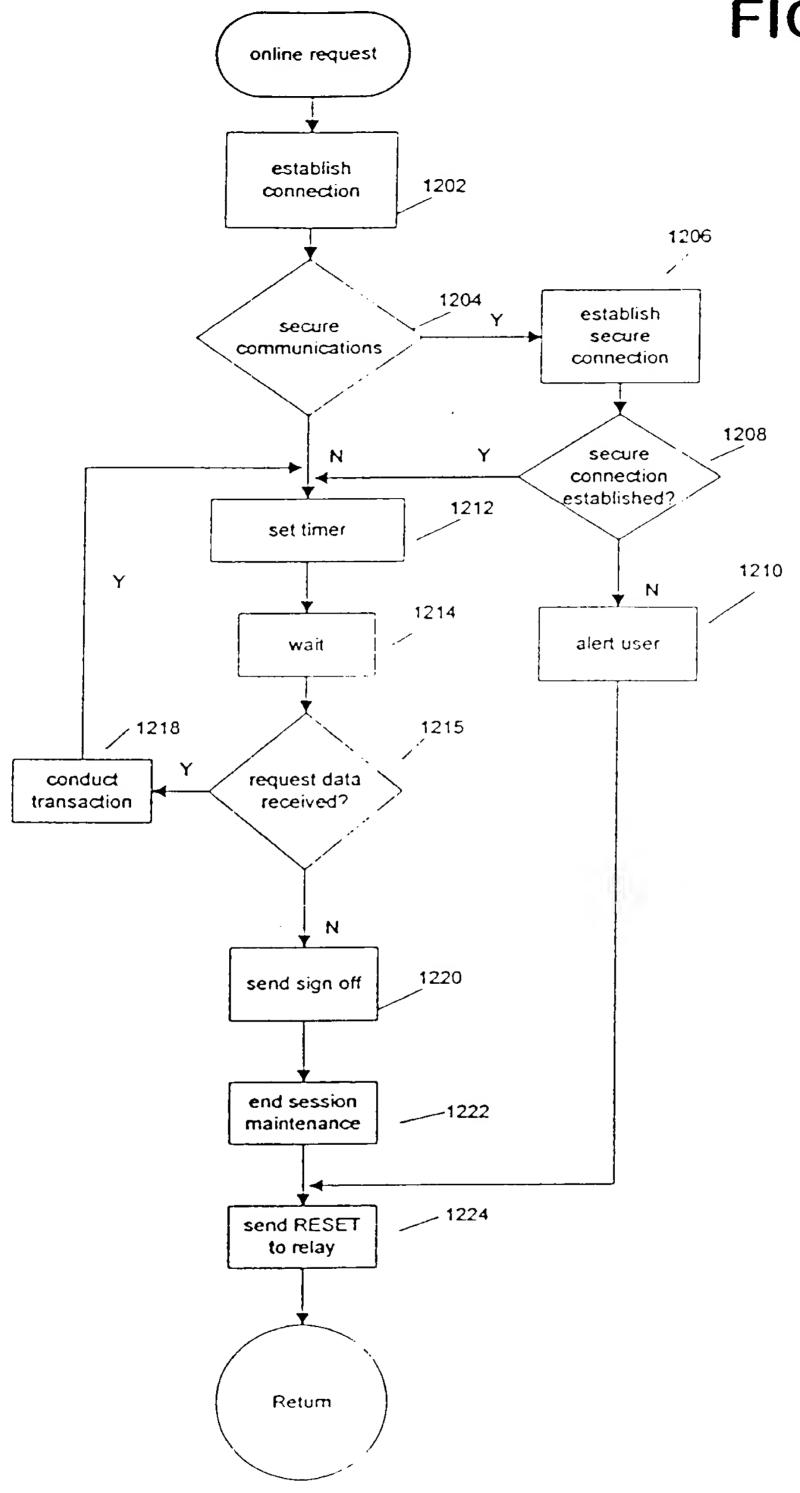

off-line request 1302 set timer 1304 wait 1308 1306 Y request data received? store request data Ν _1310 send RESET to relay Return

FIG. 13

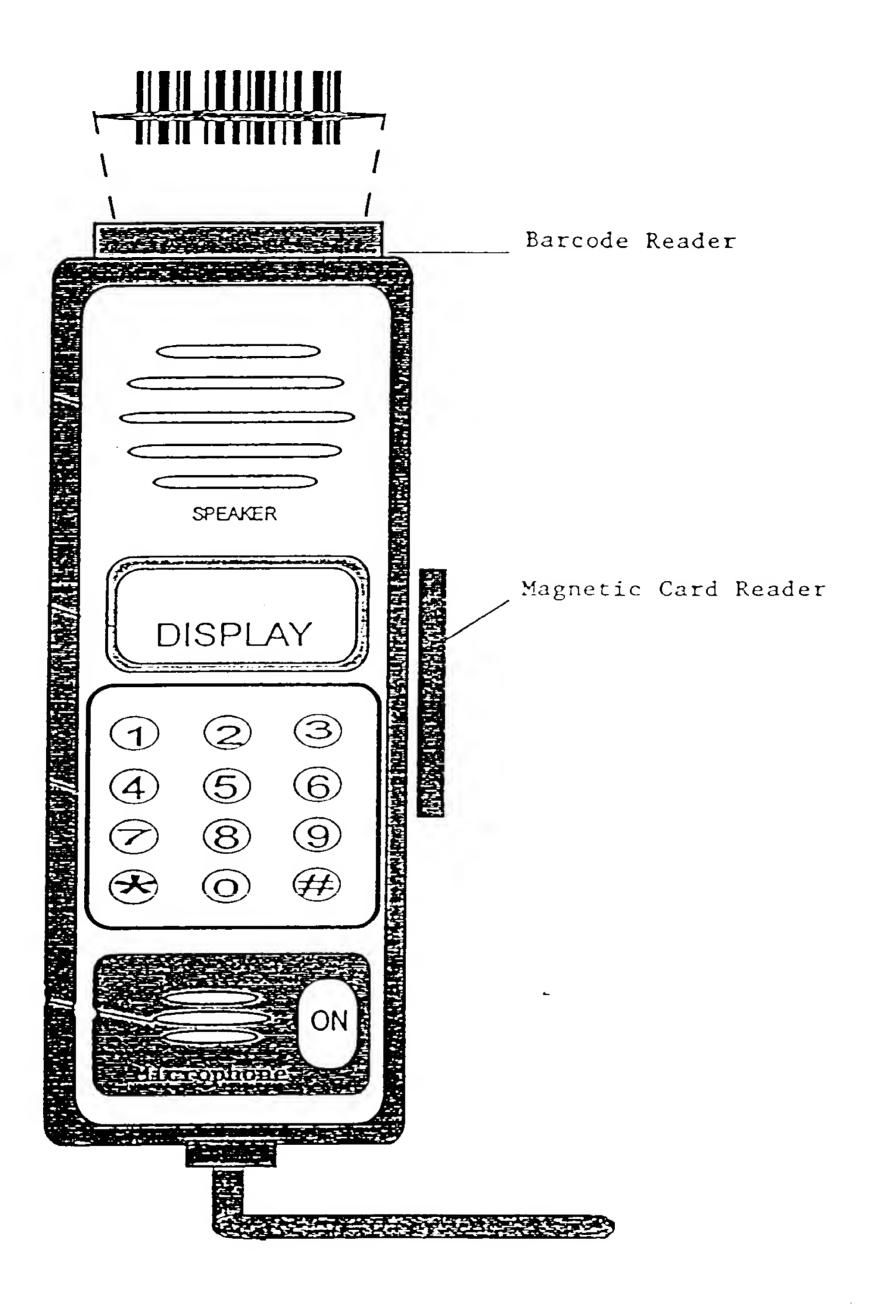


Figure 14

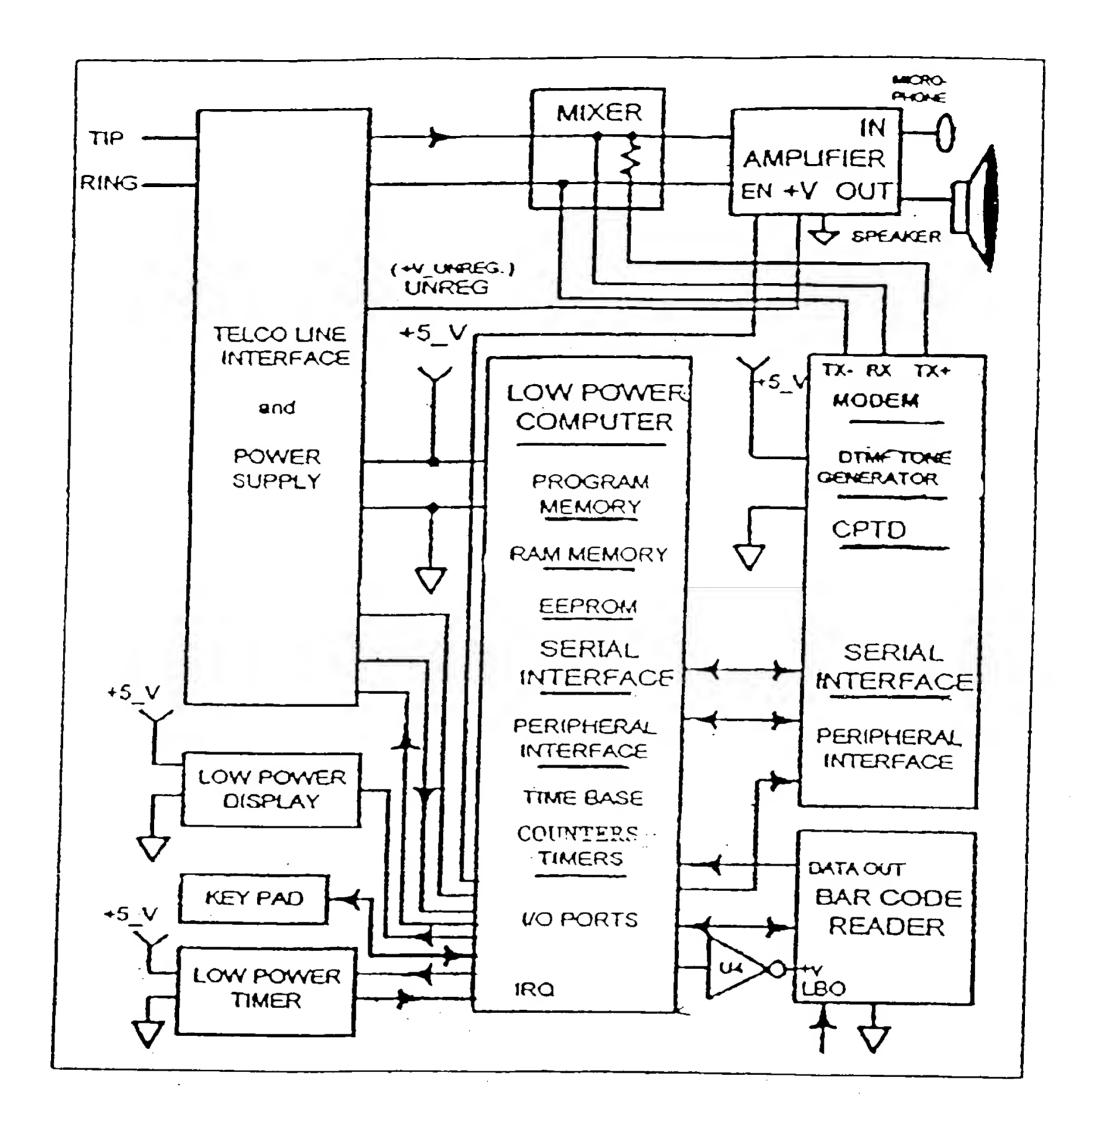


Figure 15

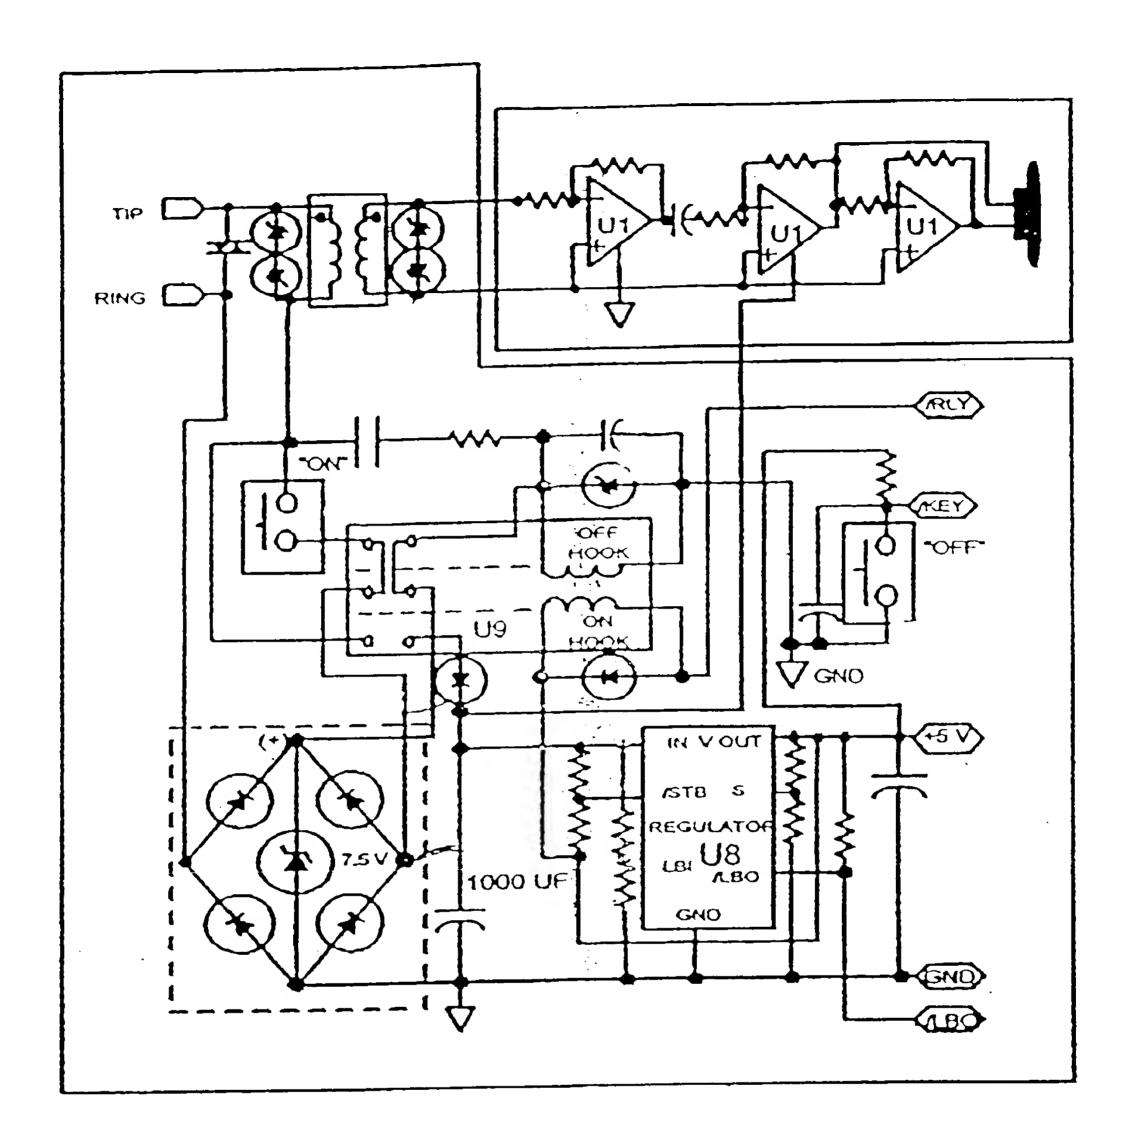


Figure 16

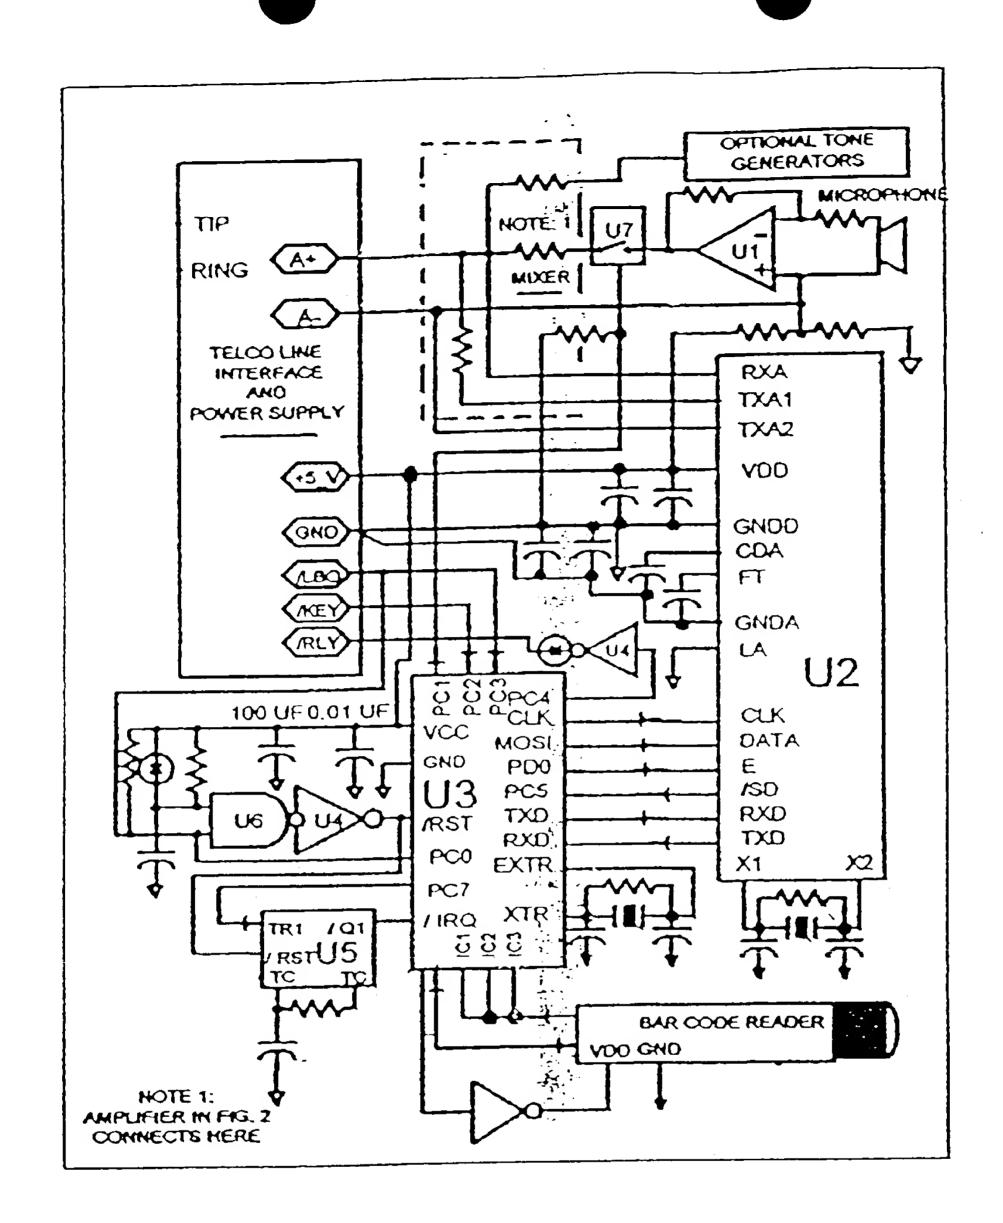


Figure 17

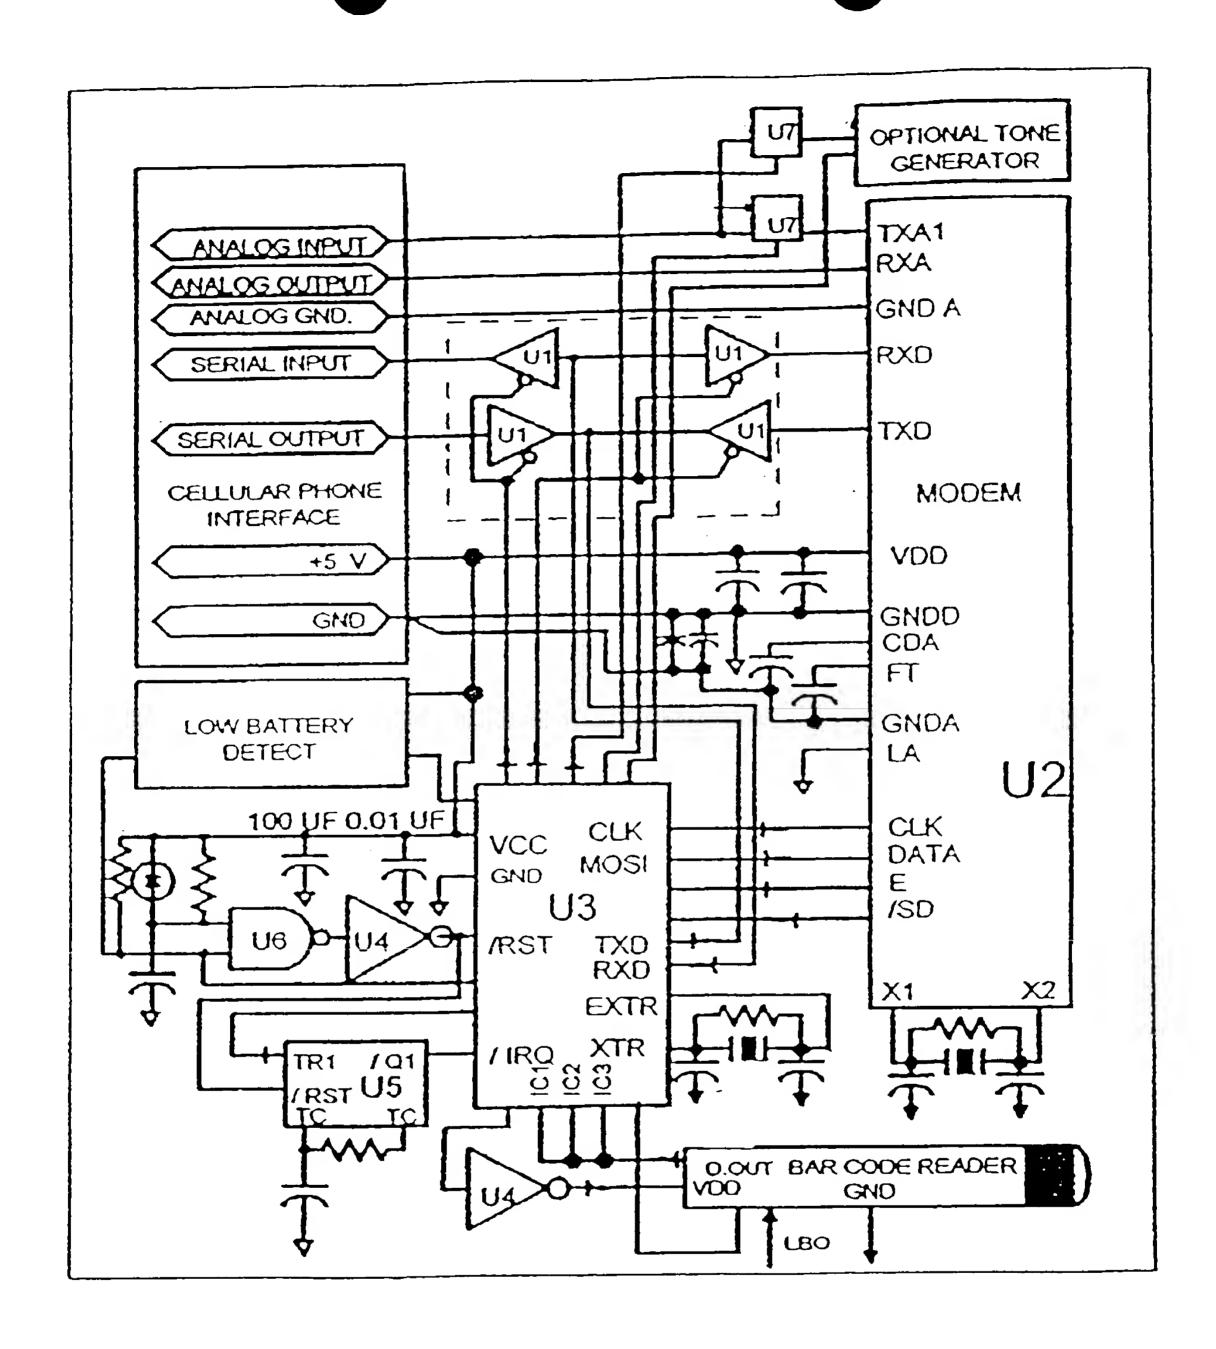


Figure 18

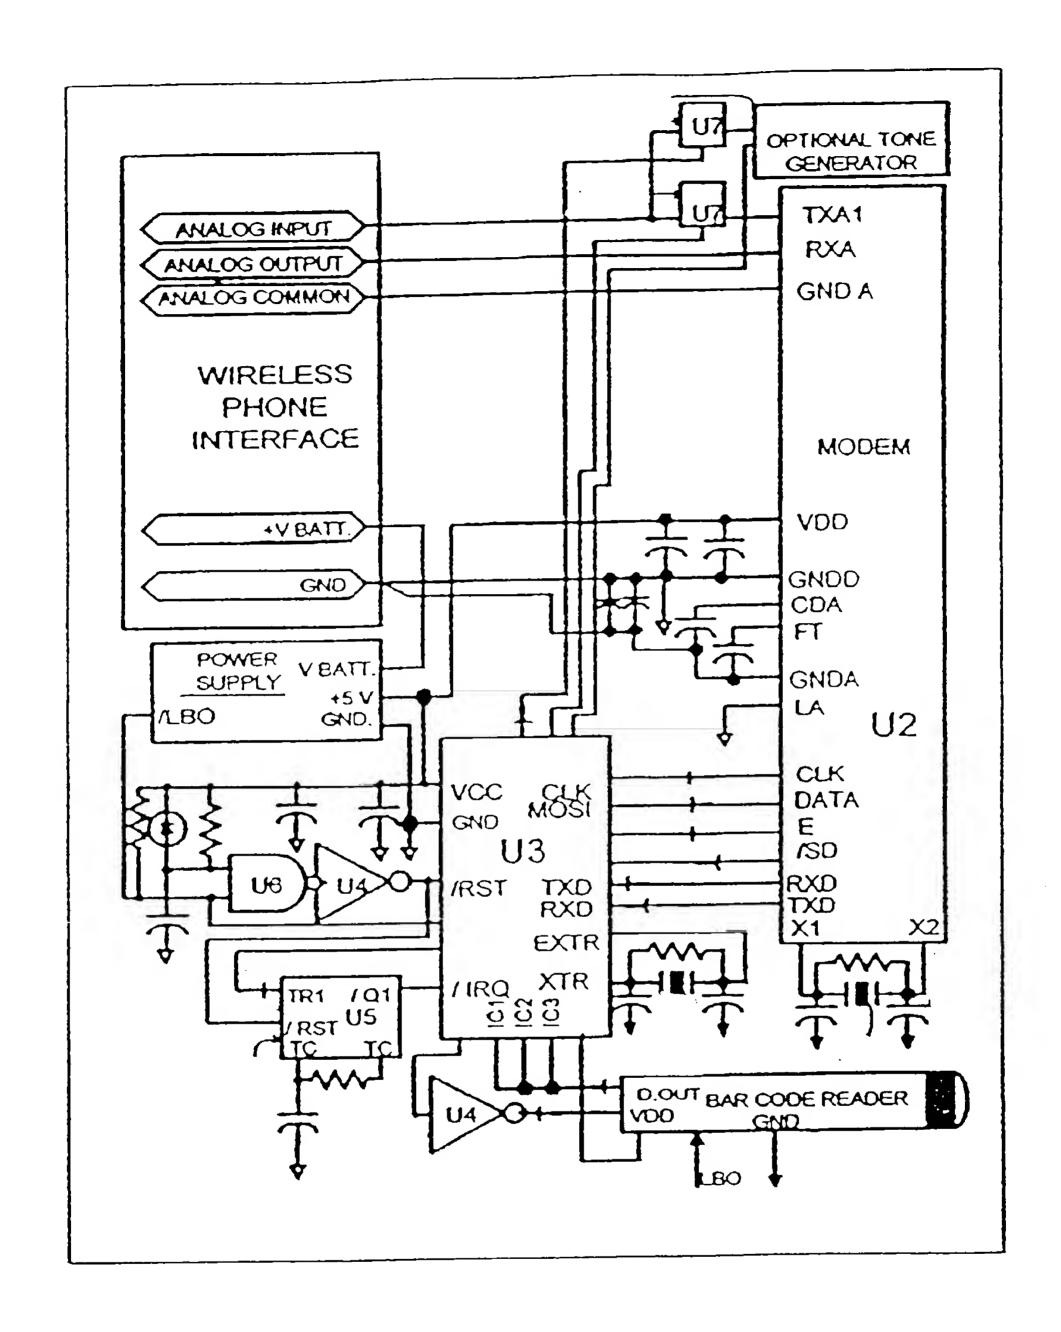


Figure 19

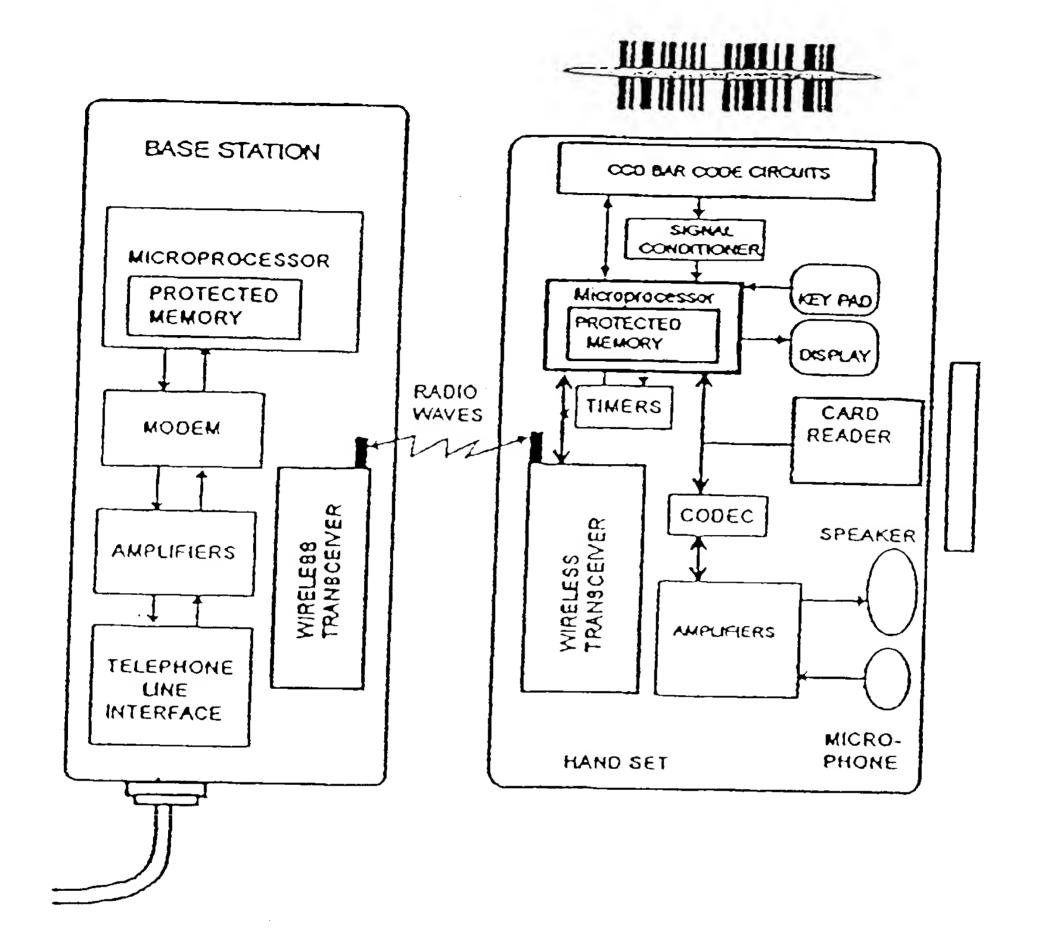


Figure 20

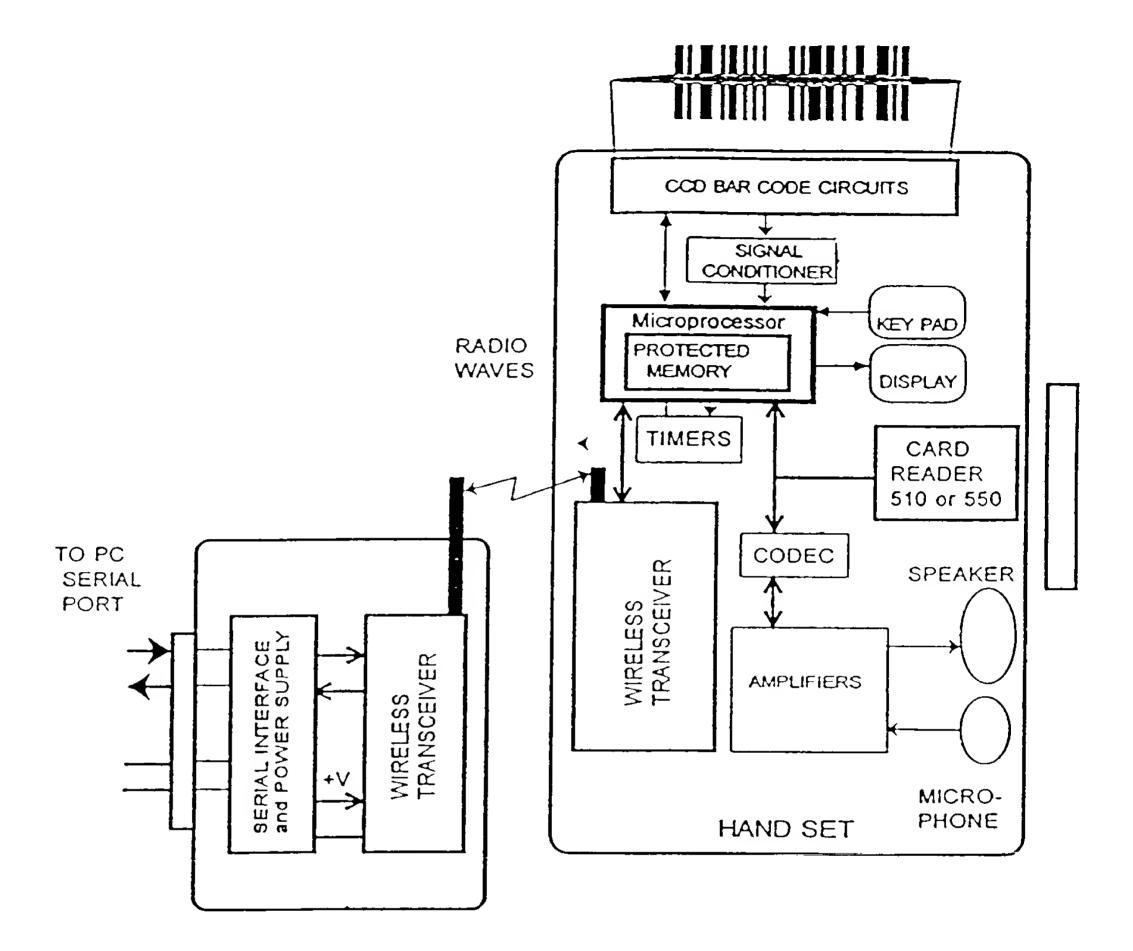


Figure 21


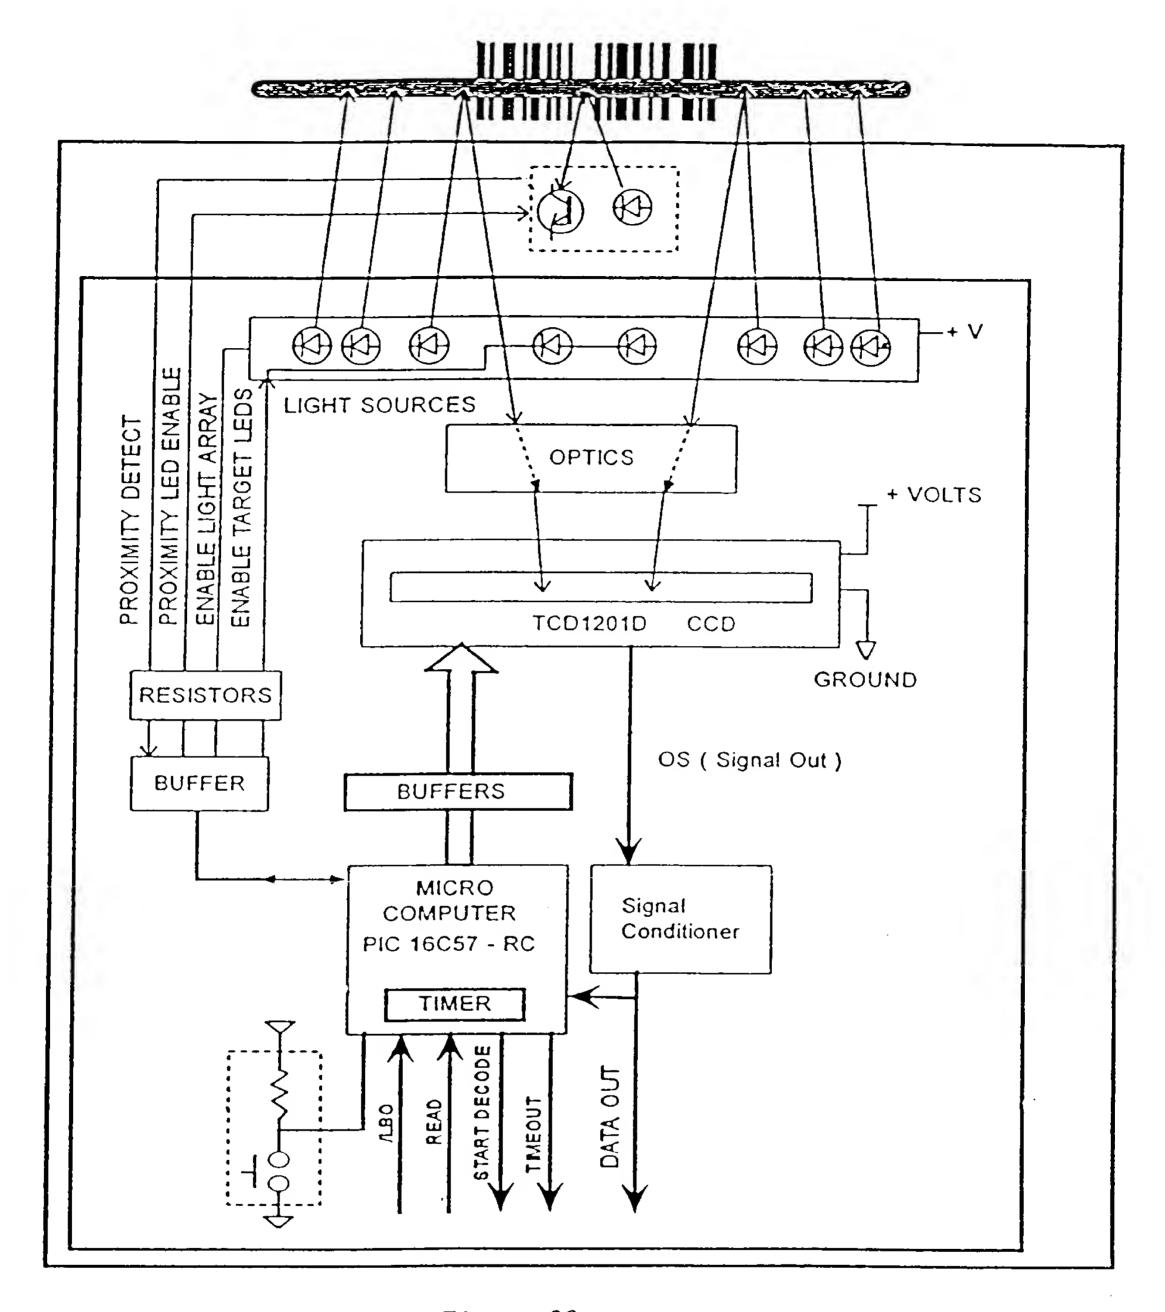


Figure 22

BAR CODE

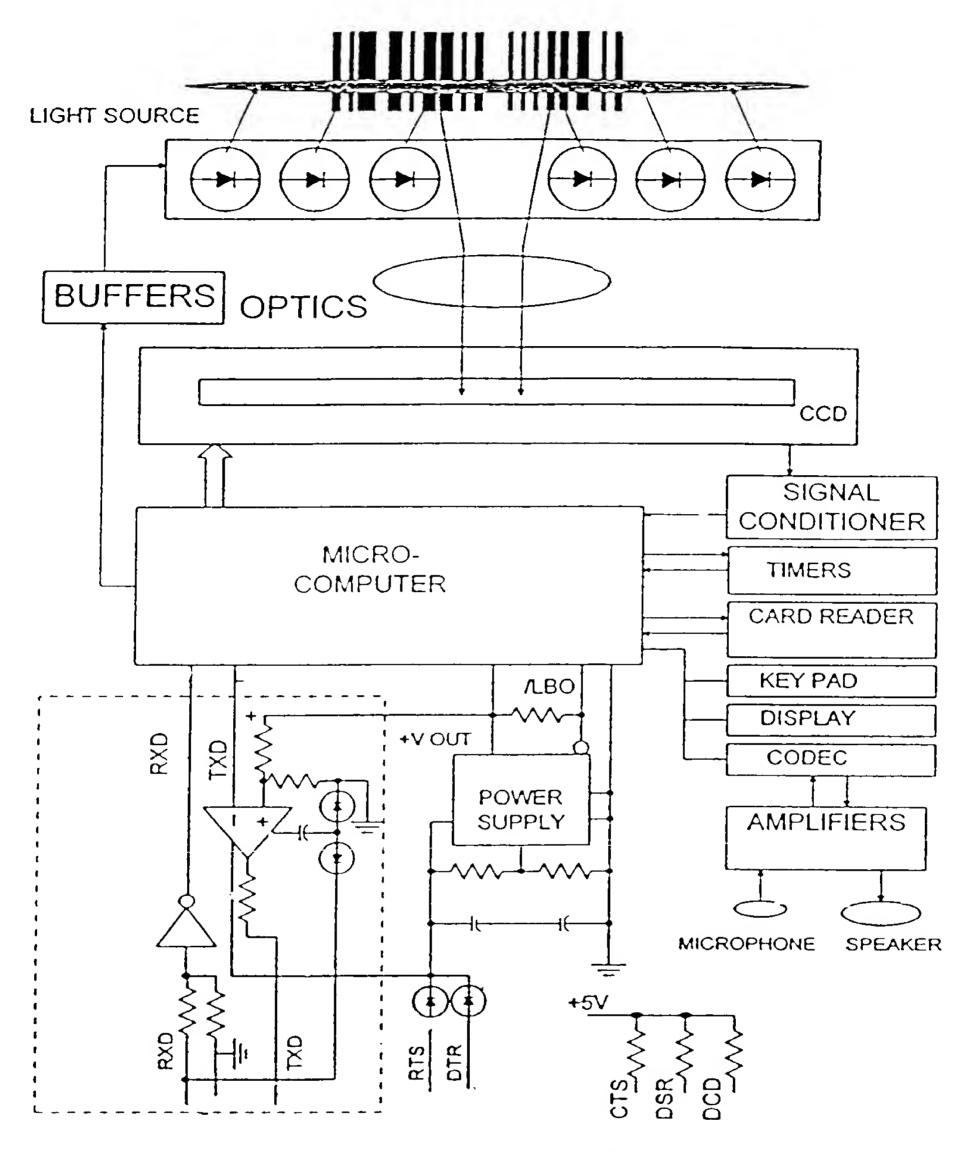

TO PC SERIAL-COM PORT

Figure 23

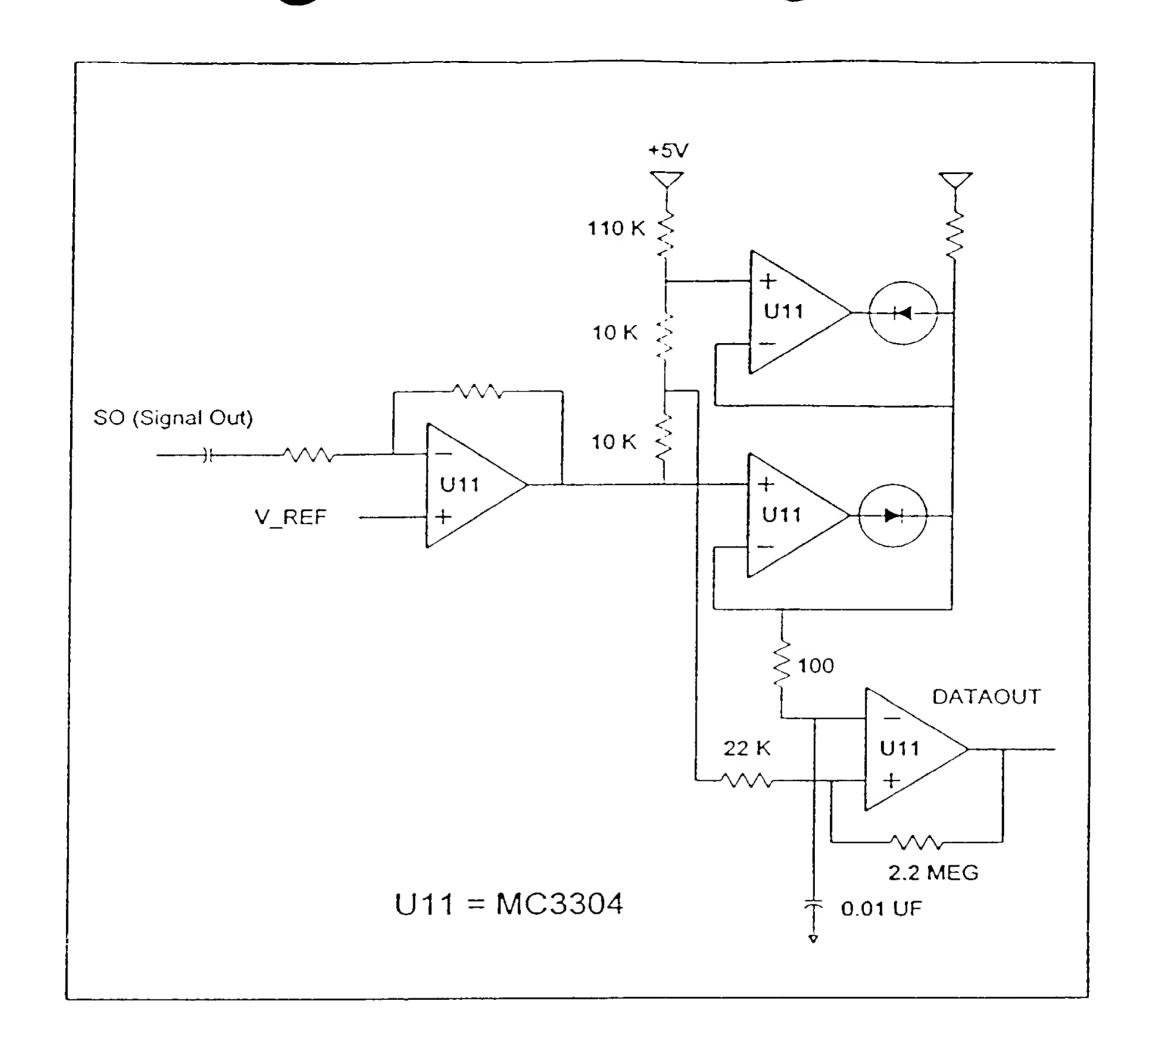


Figure 24

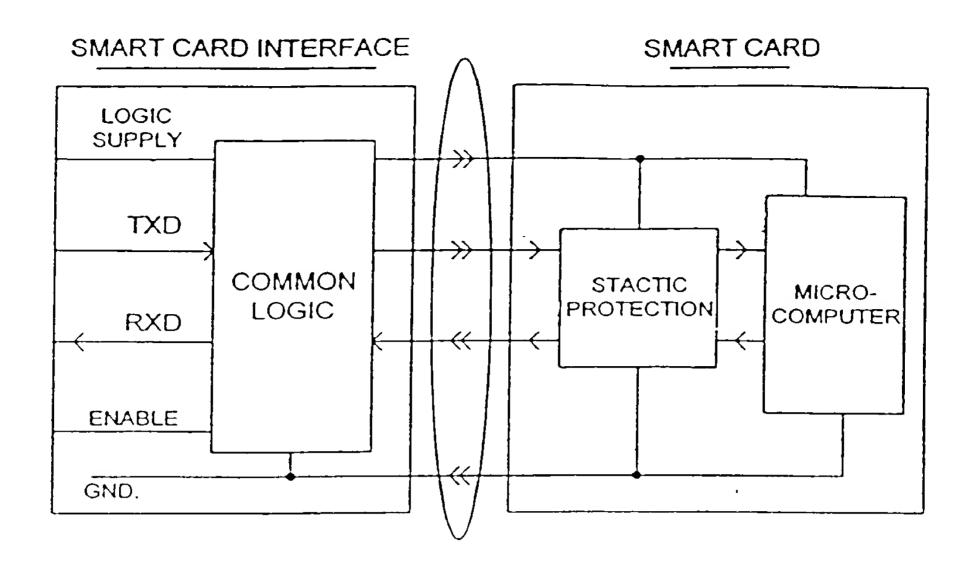


Figure 25

MAGNETIC CARD READER

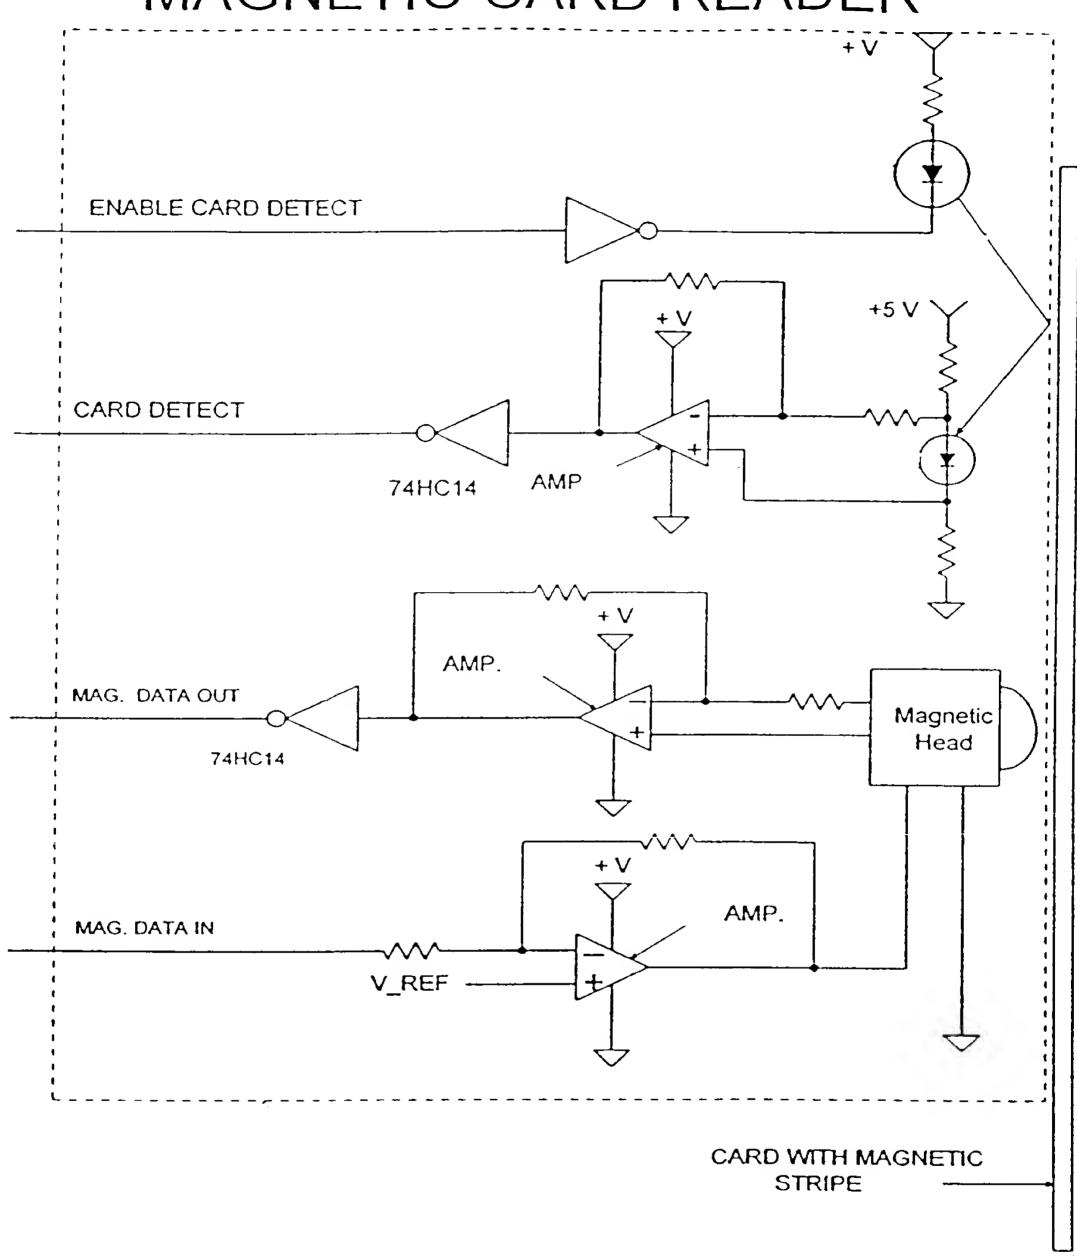


Figure 26

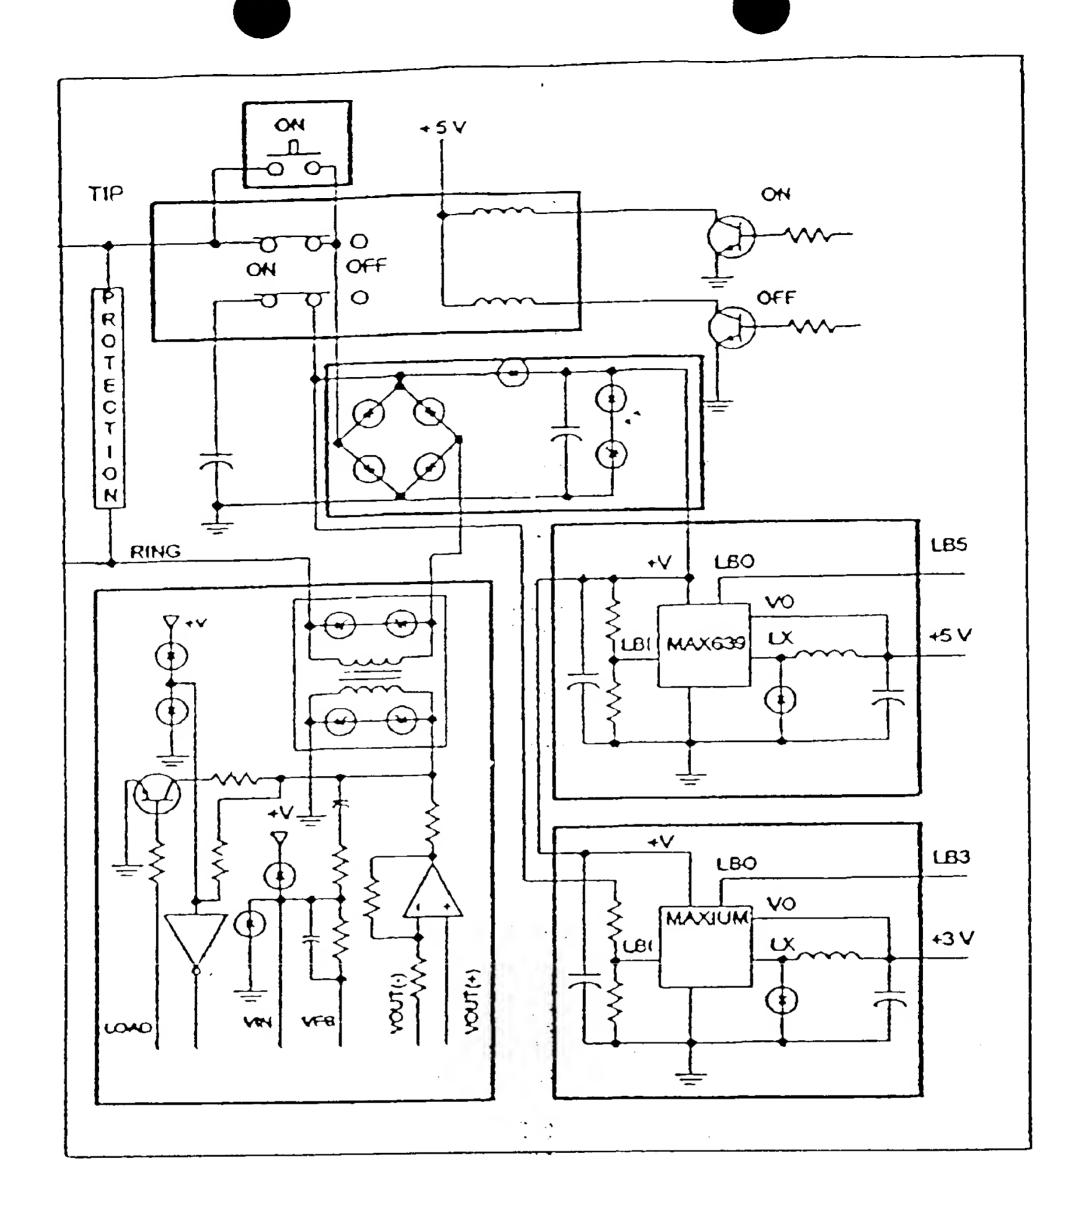


Figure 27

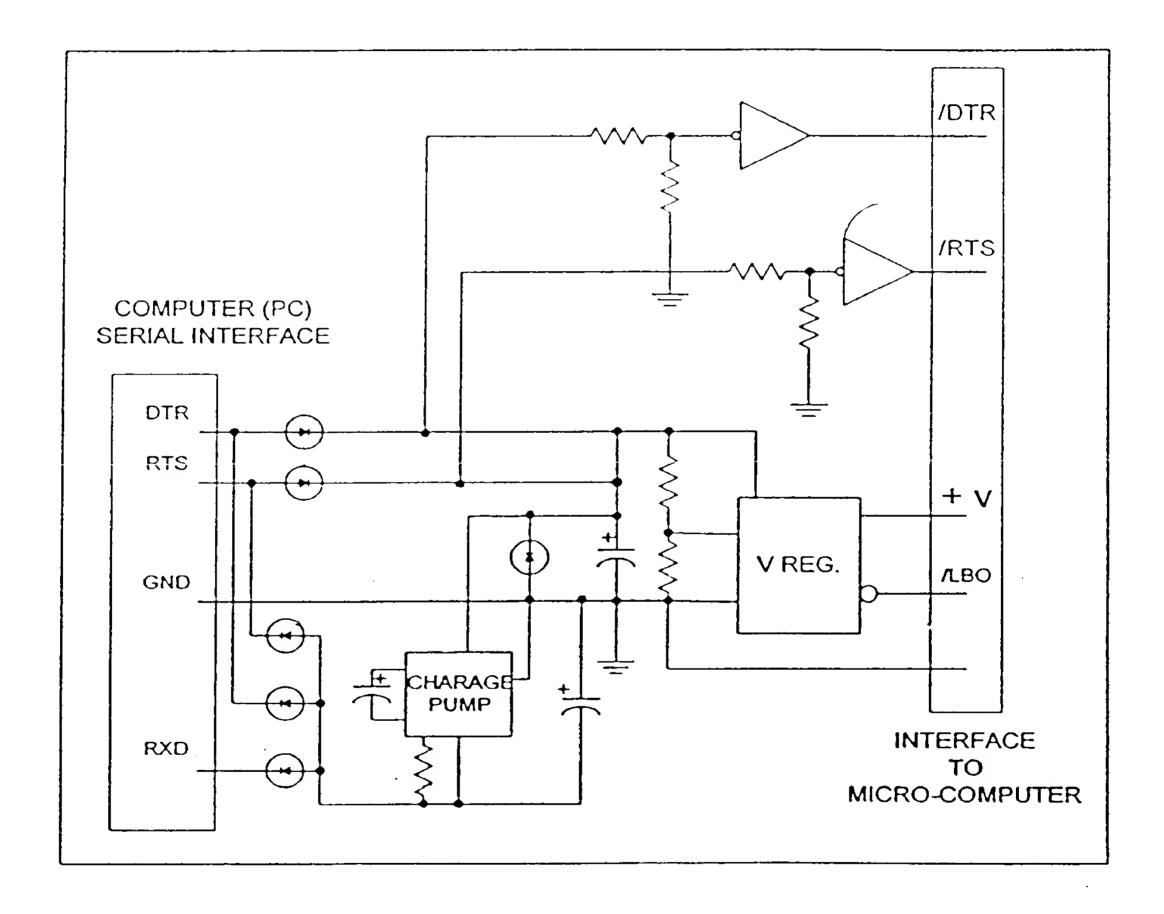


Figure 28

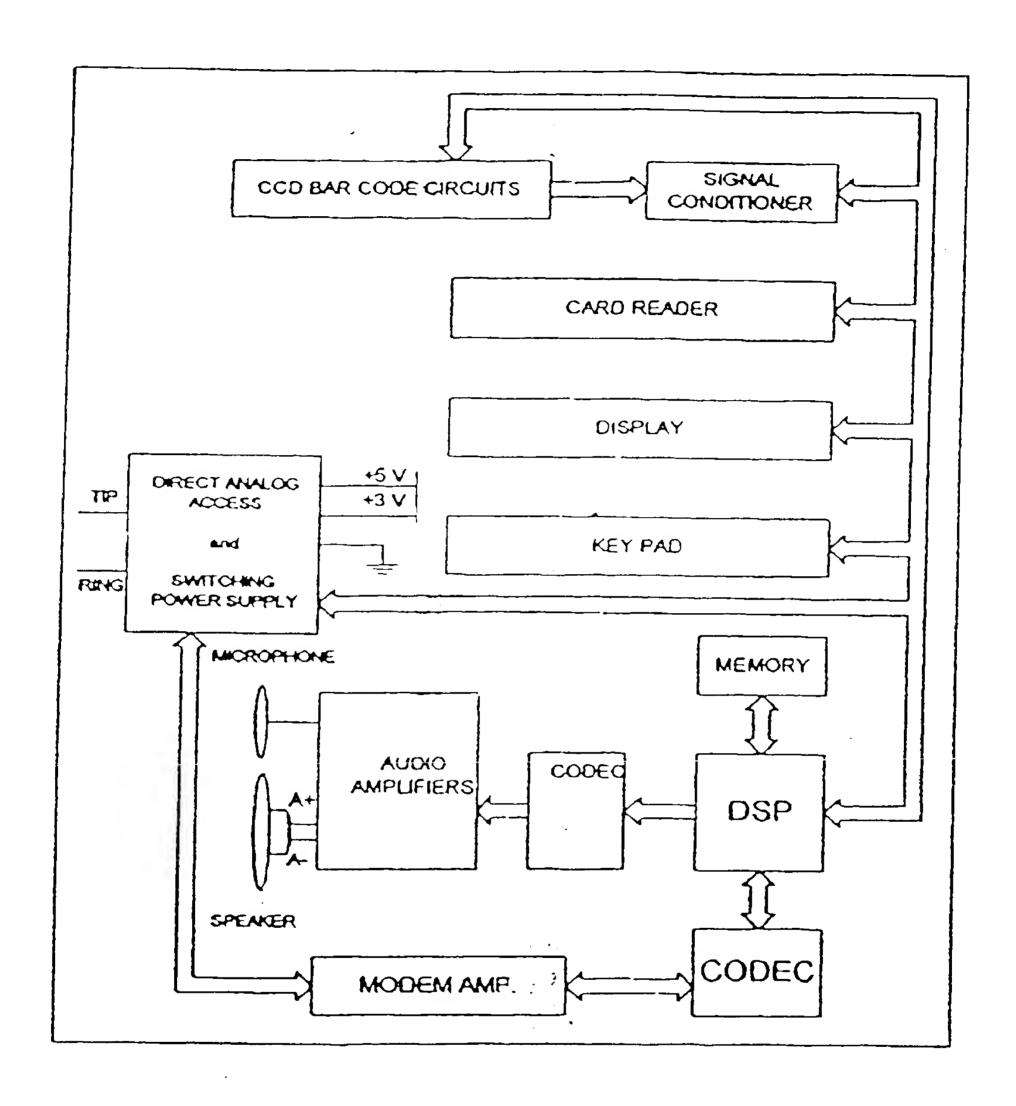


Figure 29

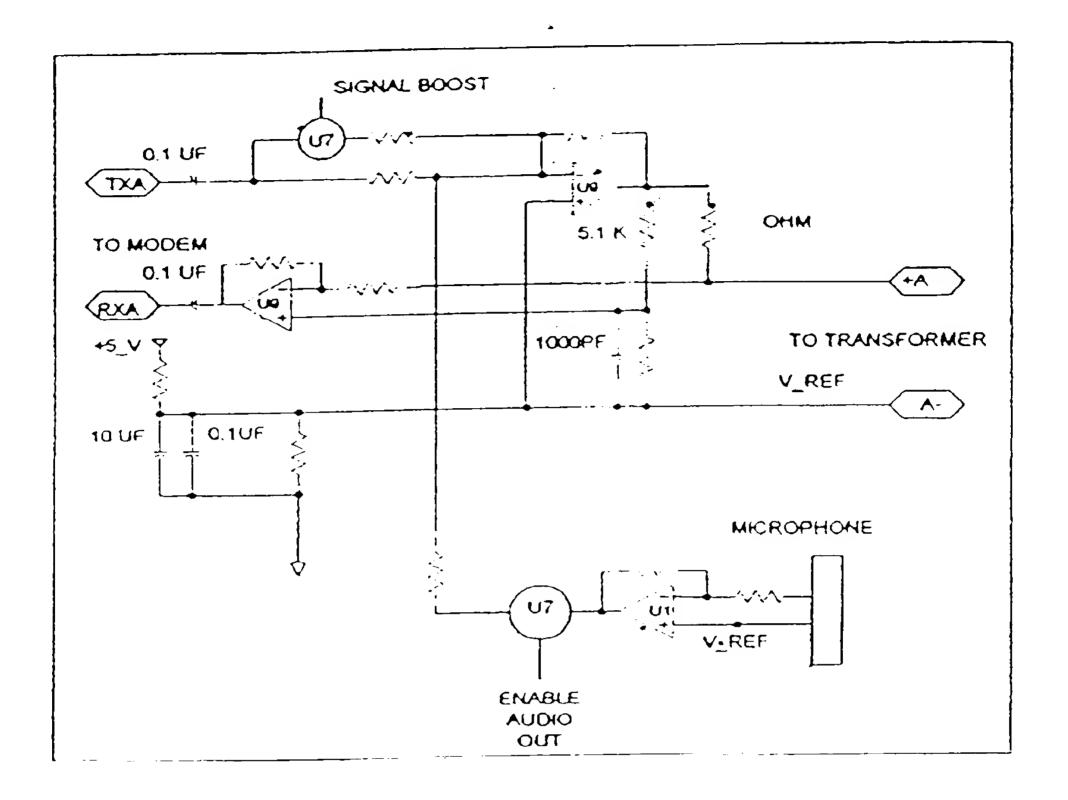


Figure 30

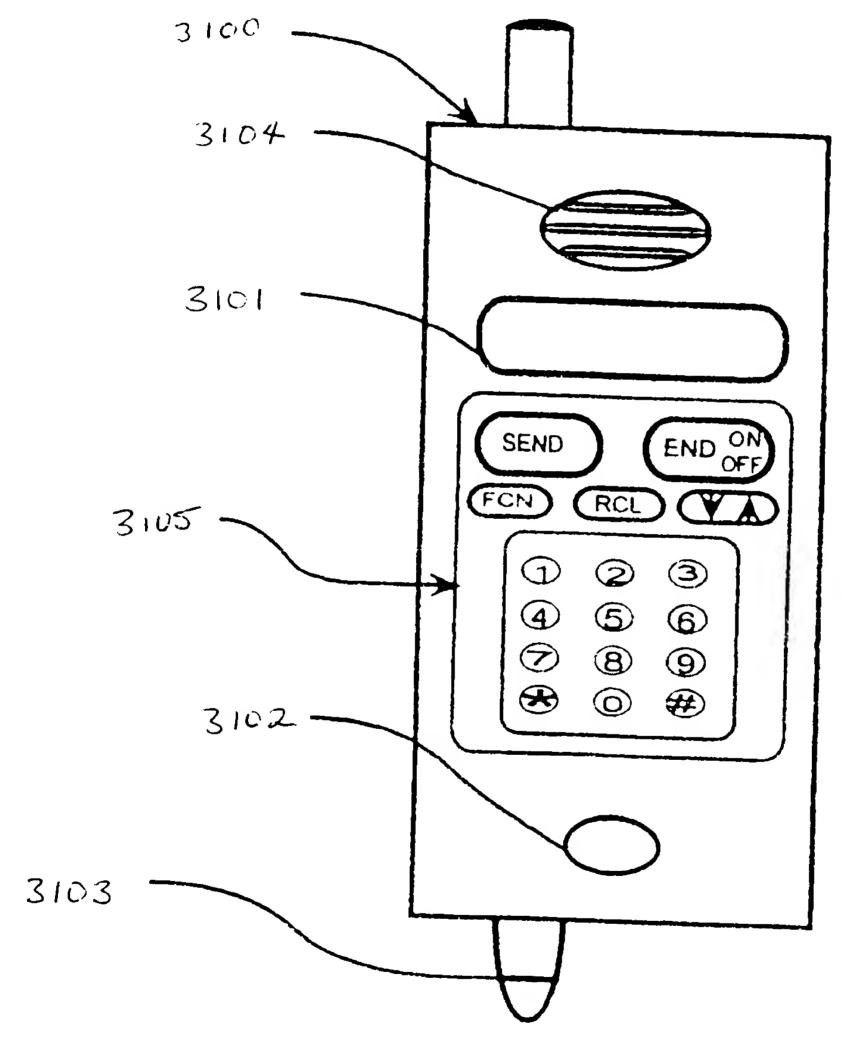


FIG. 31

